

Detailed Estimate

SoR Period: 09/04/2026 - 09/04/2027 Created By: shakuntala bindiya

AS No:3316015017/2026-2027/34481/AS TS No:3316015017/2026-2027/34481/TS

Kukra - Const. Of Sand Filter For Borewell Recharge For Community Mithai Dukan K Pas FY 26-27

3316015017/WC/1111616505

BLOCK: ARANG, GRAMA PANCHAYAT : Kukra

Heading / Description: 1 - recharge shaft								
1	79.03.01b -- Earth work in bulk excavation (exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated soil lead upto 50m and lift upto 1.5m, disposed soil to be levelled and neatly dressed. (b)Dense or hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.14	3.350	0.450	0.450	1.0	2.1300	-
2	-	3.14	1.050	1.050	1.500	1.0	5.1930	-
3	-	0.5	100.000	1.950	0.900	1.0	87.7500	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.6670	300.0	200.1	63.4137	19024.11	
Total Quantity					95.0730 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					95.07 cum			
Say 95.0730 cum @ (₹) 208.104 / cum					19785.07			
Unskilled wage					19024.11			
Unskilled Person-days					63.413691			
2	79.04.04 -- Filling in plinth with sand under floors including watering, ramming, consolidating and dressing complete.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.14	0.850	0.850	0.300	1.0	0.6810	-

LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2040	300.0	61.2	0.1389	41.68	
0982	Coarse sand (zone III)	cum	1.0000	448.67	448.67	0.6810	305.54	
Total Quantity					0.6810 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.68 cum			
Say 0.6810 cum @ (₹) 514.9687 / cum					350.69			
Unskilled wage					41.68			
Unskilled Person-days					0.13892400000000002			
3	79.04.06 -- Filling foundation or under floor with 40mm gauge graded metal and moorum including ramming in layers and watering.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.14	0.850	0.850	0.300	1.0	0.6810	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	2.8300	300.0	849.0	1.9272	578.17	
0810	Moorum	cum	0.3400	277.79	94.45	0.2315	64.32	
0293	Stone Aggregate(single size): 40 mm nominal size	cum	1.0000	1149.4	1149.4	0.6810	782.74	
Total Quantity					0.6810 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.68 cum			
Say 0.6810 cum @ (₹) 2176.562544 / cum					1482.24			
Unskilled wage					578.17			
Unskilled Person-days					1.92723000000000002			
4	79.04.13c -- Providing and laying in foundation, plinth and under floors cement concrete with 40mm nominal size graded stone aggregates (metal) i/c ramming in layers and curing complete excluding cost of form work © C.C. 1:4:8 (1cement, 4sand, 8metal)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.14	3.250	0.450	0.200	1.0	0.9180	-

LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	0.0400	444.0	17.76	0.0367	16.3	
0125	Mason (for plain stone work) 2nd class	Day	0.0500	444.0	22.2	0.0459	20.38	
0126	Mason (for Ornamental stone work) 1st class	Day	0.0500	474.0	23.7	0.0459	21.76	
0115	Coolie	Day	1.9000	300.0	570.0	1.7442	523.26	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	0.0918	150.79	
0367	Portland Cement	tonne	0.1700	6627.88	1126.74	0.1561	1034.35	
0982	Coarse sand (zone III)	cum	0.4700	448.67	210.87	0.4315	193.58	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.2400	1313.33	315.2	0.2203	289.35	
0293	Stone Aggregate(single size): 40 mm nominal size	cum	0.6500	1149.4	747.11	0.5967	685.85	
Total Quantity					0.9180 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.92 cum			
Say 0.9180 cum @ (₹) 3325.753288 / cum					3053.04			
Unskilled wage					523.26			
Unskilled Person-days					1.7442			
5	79.04.25c -- Providing and placing in position RCC for roof, beams, columns column footing lintels chhajjas, balcony, stairs etc, excluding cost of reinforcement & centring but including finishing & curing. © CC 1:2:4 (1cement, 2sand, 4graded stone aggregate 20 mm nominal size)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.14	3.350	3.350	0.150	0.25	1.3210	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7129	Scaffoldings (L.S.)	sqm	6.8000	11.0	74.8	8.9828	98.81	
0128	Mate	Day	0.0800	444.0	35.52	0.1057	46.92	
0125	Mason (for plain stone work) 2nd class	Day	0.0900	444.0	39.96	0.1189	52.79	

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	1	1	6.430			1.0	6.4300	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7737	Fly ash lime bricks (FALG Bricks) conforming to I.S. 12894	1000 nos	520.0000	3.95	2054.0	3343.6000	13207.22	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	-520.0000	3.65	-1900.41	-3343.6000	-12219.65	
Total Quantity						6.4300 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						6.43 cum		
Say 6.4300 cum @ (₹) 159.730688 / cum						1027.07		
8	79.06.05j -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.14	3.350	0.200	1.300	1.0	2.7350	-
2	-	3.14	2.100	0.200	2.800	1.0	3.6930	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	3342.5600	12215.85	
0115	Coolie	Day	1.8890	300.0	566.7	12.1425	3642.75	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.0675	110.86	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.3375	2236.71	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	1.4444	623.16	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	2.5069	1113.07	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	2.5069	1188.28	
Total Quantity						6.4280 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						6.43 cum		

Say 6.4280 cum @ (₹) 3418.779465 / cum	21975.91
Unskilled wage	3642.75
Unskilled Person-days	12.142492

9	79.09.04b -- Providing and placing in position tested steel for R.C.C. work including cutting, bending, binding etc. as per drawings and placing in position complete up to floor two level including cost of binding wire and all wastage etc. complete. (b) Cold twisted / Hot rolled deformed / Thermo mechanically treated steel bars							
---	--	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	1.320	78.500	0.900	1.0	93.2580	-

LIST								
-------------	--	--	--	--	--	--	--	--

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
1005	Twisted steel/deformed bars	quintal	0.0105	6577.0	69.06	0.9792	6440.26
7335	Binding wire	kilogram	0.0100	75.84	0.76	0.9326	70.73
0115	Coolie	Day	0.0100	300.0	3.0	0.9326	279.77
0102	Blacksmith 1st class	Day	0.0100	474.0	4.74	0.9326	442.04

Total Quantity	93.2580 kg
----------------	------------

Total Deducted Quantity	0.0000 kg
-------------------------	-----------

Net Total Quantity	93.26 kg
--------------------	----------

Say 93.2580 kg @ (₹) 80.659176 / kg	7522.11
-------------------------------------	---------

Unskilled wage	279.77
----------------	--------

Unskilled Person-days	0.93258
-----------------------	---------

10	79.10.07d -- 15mm thick cement plaster on rough side of wall in (d) Cement mortar 1:6 (1cement, 6sand)							
----	---	--	--	--	--	--	--	--


SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	2	3.140	3.350	1.300	1.0	27.3490	-
2	-	1	3.140	2.100	1.300	1.0	8.5720	-

LIST								
-------------	--	--	--	--	--	--	--	--


Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0367	Portland Cement	tonne	0.0043	6627.88	28.17	0.1527	1011.84
0124	Mason (brick layer)2nd class	Day	0.0830	444.0	36.85	2.9814	1323.76
MR7129	Scaffoldings (L.S.)	sqm	0.5351	11.0	5.89	19.2213	211.43
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0009	1642.56	1.4	0.0305	50.15

0983	Fine sand (zone IV)	cum	0.0182	431.44	7.85	0.6534	281.9
0115	Coolie	Day	0.1963	300.0	58.89	7.0513	2115.39
Total Quantity					35.9210 sqm		
Total Deducted Quantity					0.0000 sqm		
Net Total Quantity					35.92 sqm		
Say 35.9210 sqm @ (₹) 144.602286 / sqm					5194.26		
Unskilled wage					2115.39		
Unskilled Person-days					7.0512923		
2	Lump sum Type : Material	Display Board / CIB					5000.0
3	Lump sum Type : Material	Conveyance					20000.0
4	Lump sum Type : Material	Miscellaneous /Contingencies charges					3000.0
Total (₹) :							97097.83
Rounded Total (₹) :							97,098.00
Rupees Ninety Seven Thousand Ninety Eight Only							
Unskilled Manpower wages							27537.66
Materials (Includes Extra Charges)							36696.43
Carriage							0.00
Skilled							1708.43
SemiSkilled							3155.31
Lumpsum Admin							0.00
Lumpsum Material							28000.00
No of Person days							91.79

Structural Drawing

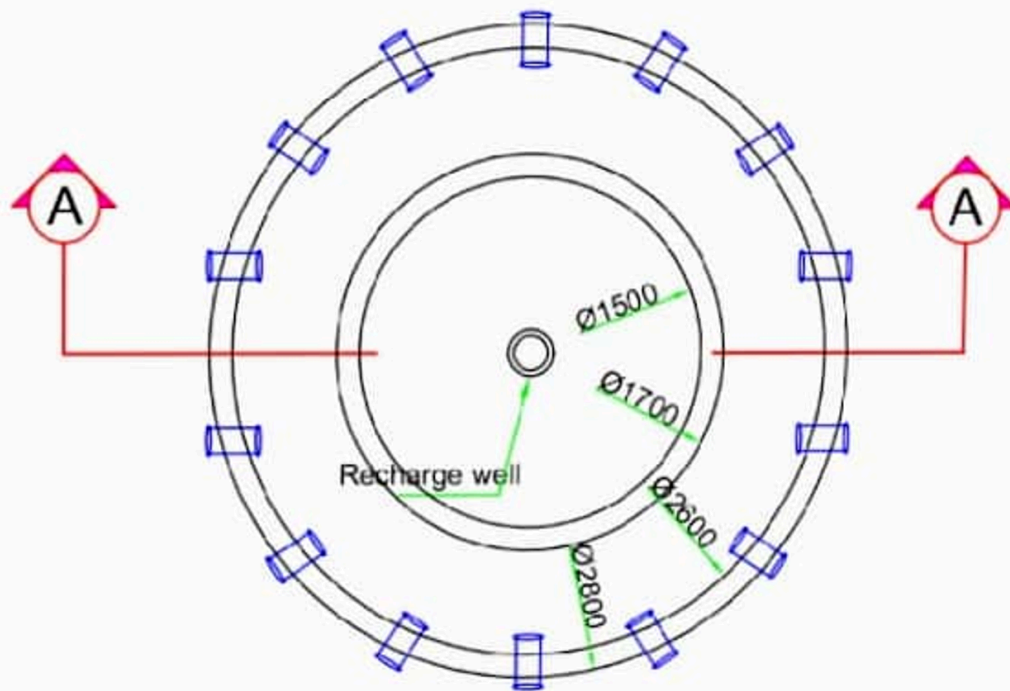

Plan of Rainwater recharge shaft

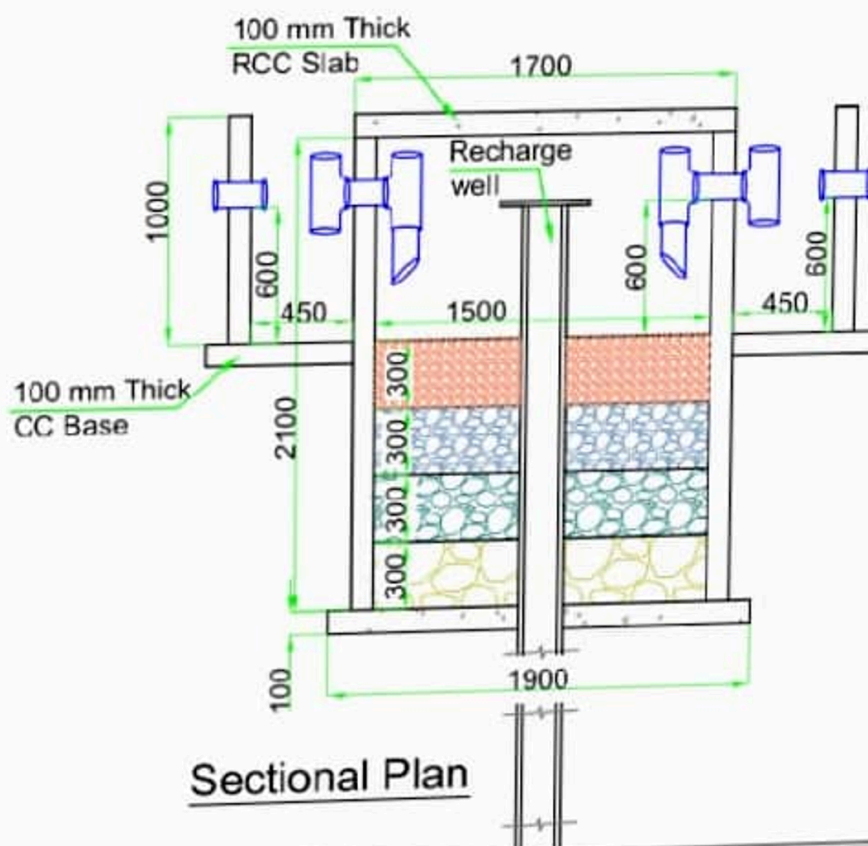

Sectional Plan