

SoR Period: 09/04/2026 - 09/04/2027 Created By: Heena Netam
TS No:3316010005/2026-2027/37003/TS

3316010005/WC/VB/1111617520

BLOCK: MAINPUR, GRAMA PANCHAYAT : Mainpurkhurd

Heading / Description: 1 - SIITE CLEARANCE								
1	79.01.01 -- Site clearance, cutting grass, raking into heaps and removing off the premises							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	3.000	3.000		1.0	9.0000	-
LIST								
Code	Description		Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0114	Beldar		Day	0.0108	300.0	3.24	0.0972	29.16
Total Quantity						9.0000 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						9.00 sqm		
Say 9.0000 sqm @ (₹) 3.3696 / sqm						30.33		
Unskilled wage						29.16		
Unskilled Person-days						0.097200000000000001		
Heading / Description: 2 - EXCAVATION WORK								
1	79.03.01b -- Earth work in bulk excavation (exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated soil lead upto 50m and lift upto 1.5m, disposed soil to be levelled and neatly dressed. (b)Dense or hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	3.140	1.000	1.000	2.000	1.0	6.2800	-
LIST								

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0115	Coolie	Day	0.6670	300.0	200.1	4.1888	1256.63
Total Quantity					6.2800 cum		
Total Deducted Quantity					0.0000 cum		
Net Total Quantity					6.28 cum		
Say 6.2800 cum @ (₹) 208.104 / cum					1306.89		
Unskilled wage					1256.63		
Unskilled Person-days					4.188759999999999		

Heading / Description: 3 - FALSE WORK

1	79.04.28 -- False work for lintels slabs, columns, walls, sills, chhajjas balconies, beams, stair cases or ornamental moulded work, curved surface etc. cast in situ including all lead and lift							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	2	3.140		0.100	1.0	0.6280	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7059	WOOD - Ballies Sal - 80mm dia (2.5m to 3.0m long)	meter	0.5133	138.43	71.06	0.3224	44.63
1197	Second class kail wood in scantling	10 cud m	0.0300	5200.43	156.01	0.0188	97.98
0115	Coolie	Day	0.2000	300.0	60.0	0.1256	37.68
0112	Carpenter 2nd class	Day	0.2300	444.0	102.12	0.1444	64.13
Total Quantity					0.6280 sqm		
Total Deducted Quantity					0.0000 sqm		
Net Total Quantity					0.63 sqm		
Say 0.6280 sqm @ (₹) 404.761347 / sqm					254.19		
Unskilled wage					37.68		
Unskilled Person-days					0.1256		

Heading / Description: 4 - PCC WORK

1	79.04.13b -- Providing and laying in foundation, plinth and under floors cement concrete with 40mm nominal size graded stone aggregates (metal) i/c ramming in layers and curing complete excluding cost of form work (b) C.C. 1:3:6 (1cement, 3sand, 6metal)							
SI No	Description	No	L	B	D	CF	Quantity	Remark

1	-	3.14	0.800	0.360	0.100	1.0	0.0900	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	0.0400	444.0	17.76	0.0036	1.6	
0124	Mason (brick layer)2nd class	Day	0.0500	444.0	22.2	0.0045	2.0	
0123	Mason (brick layer) 1st class	Day	0.0500	474.0	23.7	0.0045	2.13	
0115	Coolie	Day	1.9000	300.0	570.0	0.1710	51.3	
0367	Portland Cement	tonne	0.2200	6627.88	1458.13	0.0198	131.23	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	0.0090	14.78	
0982	Coarse sand (zone III)	cum	0.4700	448.67	210.87	0.0423	18.98	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.2400	1313.33	315.2	0.0216	28.37	
0293	Stone Aggregate(single size): 40 mm nominal size	cum	0.6500	1149.4	747.11	0.0585	67.24	
Total Quantity					0.0900 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.09 cum			
Say 0.0900 cum @ (₹) 3670.403048 / cum					330.34			
Unskilled wage					51.30			
Unskilled Person-days					0.17099999999999999			

Heading / Description: 5 - RCC WORK

1	79.04.25c -- Providing and placing in position RCC for roof, beams, columns column footing lintels chhajjas, balcony, stairs etc, excluding cost of reinforcement & centring but including finishing & curing. © CC 1:2:4 (1cement, 2sand, 4graded stone aggregate 20 mm nominal size)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	PIT COVER	3.14	1.000	1.000	0.100	1.0	0.3140	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7129	Scaffoldings (L.S.)	sqm	6.8000	11.0	74.8	2.1352	23.49	
0128	Mate	Day	0.0800	444.0	35.52	0.0251	11.15	
0125	Mason (for plain stone work) 2nd class	Day	0.0900	444.0	39.96	0.0283	12.55	

0126	Mason (for Ornamental stone work) 1st class	Day	0.0900	474.0	42.66	0.0283	13.4	
0115	Coolie	Day	2.3700	300.0	711.0	0.7442	223.25	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	0.0314	51.58	
0367	Portland Cement	tonne	0.3200	6627.88	2120.92	0.1005	665.97	
0982	Coarse sand (zone III)	cum	0.4500	448.67	201.9	0.1413	63.4	
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.2200	972.28	213.9	0.0691	67.17	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.6700	1313.33	879.93	0.2104	276.3	
Total Quantity					0.3140 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.31 cum			
Say 0.3140 cum @ (₹) 4664.245872 / cum					1464.57			
Unskilled wage					223.25			
Unskilled Person-days					0.74418			
Heading / Description: 6 - BRICK WORK								
1	79.06.05j -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	RECHARGE PIT WALL	1	3.140	0.360	2.200	1.0	2.4870	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	1293.2400	4726.33	
0115	Coolie	Day	1.8890	300.0	566.7	4.6979	1409.38	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.0261	42.89	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.1306	865.39	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	0.5588	241.1	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	0.9699	430.65	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	0.9699	459.75	
Total Quantity					2.4870 cum			

Total Deducted Quantity	0.0000 cum
Net Total Quantity	2.49 cum
Say 2.4870 cum @ (₹) 3418.779465 / cum	8502.50
Unskilled wage	1409.38
Unskilled Person-days	4.697943

Heading / Description: 7 - STEEL WORK

1	79.09.04b -- Providing and placing in position tested steel for R.C.C. work including cutting, bending, binding etc. as per drawings and placing in position complete up to floor two level including cost of binding wire and all wastage etc. complete. (b) Cold twisted / Hot rolled deformed / Thermo mechanically treated steel bars							
---	--	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	QTY OF RCC	0.314	78.500			1.0	24.6490	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
1005	Twisted steel/deformed bars	quintal	0.0105	6577.0	69.06	0.2588	1702.22
7335	Binding wire	kilogram	0.0100	75.84	0.76	0.2465	18.69
0115	Coolie	Day	0.0100	300.0	3.0	0.2465	73.95
0102	Blacksmith 1st class	Day	0.0100	474.0	4.74	0.2465	116.84

Total Quantity	24.6490 kg
Total Deducted Quantity	0.0000 kg
Net Total Quantity	24.65 kg
Say 24.6490 kg @ (₹) 80.659176 / kg	1988.17
Unskilled wage	73.95
Unskilled Person-days	0.246490000000000001

Heading / Description: 8 - PLASTER WORK

1	79.10.05c -- 10mm thick cement plaster on fair side of wall in © Cement mortar 1:5 (1cement, 5sand)							
---	--	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	2	3.140	0.800	2.200	1.0	11.0530	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0124	Mason (brick layer)2nd class	Day	0.0600	444.0	26.64	0.6632	294.45

MR7129	Scaffoldings (L.S.)	sqm	0.6143	11.0	6.76	6.7899	74.69
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0005	1642.56	0.9	0.0061	9.99
0367	Portland Cement	tonne	0.0034	6627.88	22.6	0.0377	249.81
0983	Fine sand (zone IV)	cum	0.0118	431.44	5.08	0.1301	56.13
0115	Coolie	Day	0.1599	300.0	47.97	1.7674	530.21
Total Quantity					11.0530 sqm		
Total Deducted Quantity					0.0000 sqm		
Net Total Quantity					11.05 sqm		
Say 11.0530 sqm @ (₹) 114.347821 / sqm					1263.89		
Unskilled wage					530.21		
Unskilled Person-days					1.7673747		

Heading / Description: 9 - UPVC PIPE FITTING WORK

1	79.21.51b -- दीवार की सतह पर UPVC पाईप की आपूर्ति और फिक्सिंग (IS 13592 टाइप के अनुरूप जिसमें IS 5382 के अनुरूप सील के साथ जुड़ना शामिल है थर्मल विस्तार के लिए 10 मिमी अंतर छोड़कर) दीवार की सतह पर UPVC पाईप की आपूर्ति और फिक्सिंग (IS 13592 टाइप के अनुरूप जिसमें IS 5382 के अनुरूप सील के साथ जुड़ना शामिल है थर्मल विस्तार के लिए 10 मिमी अंतर छोड़कर) b. 100 मी मी व्यास						
---	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	2	6.000			1.0	12.0000	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
7191	uPVC pipes (working pressure 4 kg/cm ²) Rubber (seal) Ring 110 mm dia	each	0.1667	11.0	1.83	2.0000	22.0
7189	uPVC pipes (working pressure 4 Kg / cm ²) Single socketed pipe 110 mm dia	meter	1.0000	260.0	260.0	12.0000	3120.0
0124	Mason (brick layer)2nd class	Day	0.0183	444.0	8.14	0.2200	97.68
0115	Coolie	Day	0.0750	300.0	22.5	0.9000	270.0
0116	Fitter(grade1)	Day	0.0383	474.0	18.17	0.4600	218.04
Total Quantity					12.0000 meter		
Total Deducted Quantity					0.0000 meter		
Net Total Quantity					12.00 meter		
Say 12.0000 meter @ (₹) 323.069067 / meter					3876.83		
Unskilled wage					270.00		


Unskilled Person-days							0.9	
2	23.5 -- Supplying, filling, spreading & leveling stone boulders of size range 5 cm to 20 cm, in recharge pit, in the required thickness, for all leads & lifts, all complete as per direction of Engineer -in- charges							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	3.140	0.640	0.400	1.0	0.8040	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7753	Boulder 50 mm to 200 mm	cum	1.0000	229.07	229.07	0.8040	184.17	
0114	Beldar	Day	0.2500	300.0	75.0	0.2010	60.3	
9999	Sundries	L.S	1.0000	3.0	3.0	0.8040	2.41	
Total Quantity					0.8040 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.80 cum			
Say 0.8040 cum @ (₹) 307.07 / cum					246.88			
Unskilled wage					60.30			
Unskilled Person-days					0.201			
3	23.6 -- Supplying, filling, spreading & leveling gravels of size range 5 mm to 10 mm, in the recharge pit,over the existing layer of boulders, in required thickness, for all leads & lifts, all complete as per direction of Engineer -in-Charge							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	3.140	0.640	0.300	1.0	0.6030	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7754	Gravel 5 mm to 10 mm	cum	1.0000	0.0	0.0	0.6030	0.0	
0114	Beldar	Day	0.2500	300.0	75.0	0.1508	45.23	
9999	Sundries	L.S	1.0000	3.0	3.0	0.6030	1.81	
Total Quantity					0.6030 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.60 cum			
Say 0.6030 cum @ (₹) 78.0 / cum					47.03			
Unskilled wage					45.23			

Unskilled Person-days						0.15075		
4	23.7 -- Supplying, filling, spreading & leveling coarse sand of size range 1.5 mm to 2 mm in recharge pit, in required thickness over gravel layer, for all leads & lifts, all complete as per direction of Engineer-in-charge.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	3.140	0.640	0.300	1.0	0.6030	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7755	Gravel 1.5 mm to 2 mm	cum	1.0000	0.0	0.0	0.6030	0.0	
0114	Beldar	Day	0.2500	300.0	75.0	0.1508	45.23	
9999	Sundries	L.S	1.0000	3.0	3.0	0.6030	1.81	
Total Quantity					0.6030 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					0.60 cum			
Say 0.6030 cum @ (₹) 78.0 / cum					47.03			
Unskilled wage					45.23			
Unskilled Person-days					0.15075			
5	79.06.26 -- Add for Fly Ash brick in item no.0603 and 0605							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	3.140	0.360	2.200	1.0	2.4870	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7737	Fly ash lime bricks (FALG Bricks) conforming to I.S. 12894	1000 nos	520.0000	3.95	2054.0	1293.2400	5108.3	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	-520.0000	3.65	-1900.41	-1293.2400	-4726.33	
Total Quantity					2.4870 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					2.49 cum			
Say 2.4870 cum @ (₹) 159.730688 / cum					397.25			
10	Lump sum Type : Material	Miscellaneous /Contingencies charges						357.0

11	Lump sum Type : Material	BFT/TA/Mate			178.0
12	Lump sum Type : Material	Display Board / CIB			3000.0
Total (₹) :					23290.91
Rounded Total (₹) :					23,291.00
Rupees Twenty Three Thousand Two Hundred and Ninety One Only					
Unskilled Manpower wages					4032.31
Materials (Includes Extra Charges)					13999.23
Carriage					0.00
Skilled					810.15
SemiSkilled					914.21
Lumpsum Admin					0.00
Lumpsum Material					3535.00
No of Person days					13.44

Structural Drawing

अयक्ति नाम - Rain water harvesting
 ठाम - मेनपुरखुर्द, ग्रामपं. - मेनपुरखुर्द

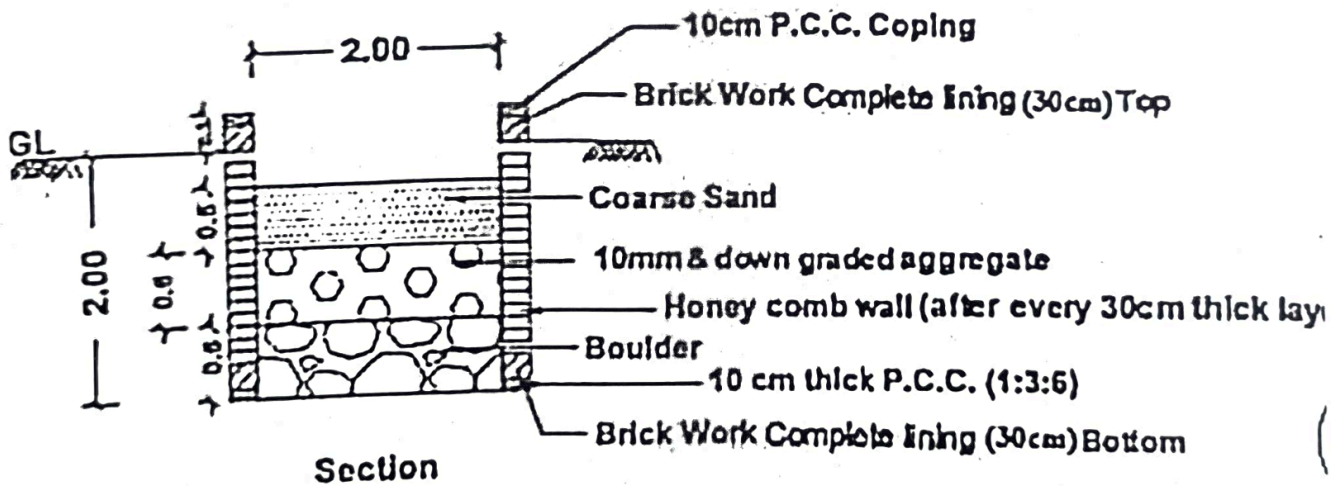

Am
 7.5
 J.P. Mainpur