

Detailed Estimate

SoR Period: 09/04/2026 - 09/04/2027 Created By: TULSI DEWANGAN
TS No:3304008044/2026-2027/33442/TS

Construction of Crematorium of Community Deorsur

3304008044/AV/1111477463

BLOCK: Mohla, GRAMA PANCHAYAT : Deorsur

Heading / Description: 1 - Construction of Crematorium for Community								
1	79.01.01 -- Site clearance, cutting grass, raking into heaps and removing off the premises							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Site clearance								
1	Sc	1	9.000	5.000		1.0	45.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	0.0108	300.0	3.24	0.4860	145.8	
Total Quantity					45.0000 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					45.00 sqm			
Say 45.0000 sqm @ (₹) 3.3696 / sqm					151.63			
Unskilled wage					145.80			
Unskilled Person-days					0.48600000000000004			
2	79.03.01b -- Earth work in bulk excavation (exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated soil lead upto 50m and lift upto 1.5m, disposed soil to be levelled and neatly dressed. (b)Dense or hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earth work								
1	COLUMN	8	1.200	1.200	1.200	1.0	13.8240	-
2	LW	2	8.000	0.300	0.200	1.0	0.9600	-
3	SW	2	3.600	0.300	0.200	1.0	0.4320	-

4	STEP	2	2.500	0.300	0.200	1.0	0.3000	-
deduction								
5	column excavation	8	1.200	0.300	0.300	1.0	-0.8640	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.6670	300.0	200.1	9.7729	2931.87	
Total Quantity					15.5160 cum			
Total Deducted Quantity					-0.8640 cum			
Net Total Quantity					14.65 cum			
Say 14.6520 cum @ (₹) 208.104 / cum					3049.14			
Unskilled wage					2931.87			
Unskilled Person-days					9.772884			
3	79.04.02 -- Filling foundation and around masonry work with moorum l/c ramming layers and watering.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
moorum								
1	mooum	1	7.600	3.600	0.400	1.0	10.9440	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2360	300.0	70.8	2.5828	774.84	
0810	Moorum	cum	1.0000	277.79	277.79	10.9440	3040.13	
Total Quantity					10.9440 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					10.94 cum			
Say 10.9440 cum @ (₹) 362.5336 / cum					3967.57			
Unskilled wage					774.84			
Unskilled Person-days					2.5827839999999997			
4	79.04.28 -- False work for lintels slabs, columns, walls, sills, chhajjas balconies, beams, stair cases or ornamental moulded work, curved surface etc. cast in situ including all lead and lift							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earth work								
1	COL.UP TO LINTEL	16	0.200		2.400	1.0	7.6800	-
2	.	16	0.300		2.400	1.0	11.5200	-

	(b) C.C. 1:3:6 (1cement, 3sand, 6metal)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
base work								
1	COLUMN	8	1.200	1.200	0.150	1.0	1.7280	-
2	LW	2	8.000	0.300	0.100	1.0	0.4800	-
3	SW	2	3.600	0.300	0.100	1.0	0.2160	-
4	STEP	2	2.500	0.300	0.100	1.0	0.1500	-
5	BASE FLOOR	1	7.600	3.600	0.100	1.0	2.7360	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	0.0400	444.0	17.76	0.2124	94.31	
0124	Mason (brick layer)2nd class	Day	0.0500	444.0	22.2	0.2655	117.88	
0123	Mason (brick layer) 1st class	Day	0.0500	474.0	23.7	0.2655	125.85	
0115	Coolie	Day	1.9000	300.0	570.0	10.0890	3026.7	
0367	Portland Cement	tonne	0.2200	6627.88	1458.13	1.1682	7742.69	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	0.5310	872.2	
0982	Coarse sand (zone III)	cum	0.4700	448.67	210.87	2.4957	1119.75	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.2400	1313.33	315.2	1.2744	1673.71	
0293	Stone Aggregate(single size): 40 mm nominal size	cum	0.6500	1149.4	747.11	3.4515	3967.15	
Total Quantity						5.3100 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						5.31 cum		
Say 5.3100 cum @ (₹) 3670.403048 / cum						19489.84		
Unskilled wage						3026.70		
Unskilled Person-days						10.089		
6	79.04.25b -- Providing and placing in position RCC for roof, beams, columns column footing lintels chhajjas, balcony, stairs etc, excluding cost of reinforcement & centring but including finishing & curing. (b) CC 1:1.5:3 (1cement, 1.5sand, 3graded stone aggregate 20 mm nominal size)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
rcc work								
1	FOOTING	8	1.100	1.100	0.150	1.0	1.4520	-

2	TP	8	0.325			1.0	2.6000	-
3	COL UP TO PB	8	0.200	0.300	0.900	1.0	0.4320	-
4	PB LW	2	8.000	0.200	0.300	1.0	0.9600	-
5	PB SW	2	3.600	0.200	0.300	1.0	0.4320	-
6	COL UP TO LB	8	0.200	0.300	2.400	1.0	1.1520	-
7	LB LW	2	8.000	0.200	0.300	1.0	0.9600	-
8	.	2	3.600	0.200	0.300	1.0	0.4320	-
9	CHAJJA LW	2	9.200	0.600	0.100	1.0	1.1040	-
10	SW	2	4.000	0.600	0.100	1.0	0.4800	-
11	COL UP TO SLAB	8	0.200	0.300	1.600	1.0	0.7680	-
12	SB LW	2	8.000	0.200	0.200	1.0	0.6400	-
13	SW	2	3.600	0.200	0.200	1.0	0.2880	-
14	T BEAM	2	3.600	0.200	0.300	1.0	0.4320	-
15	SLAB	1	8.600	4.600	0.100	1.0	3.9560	-
16	COL CHIMNI	4	0.200	0.200	0.700	1.0	0.1120	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7129	Scaffoldings (L.S.)	sqm	6.8000	11.0	74.8	110.1600	1211.76
0128	Mate	Day	0.0800	444.0	35.52	1.2960	575.42
0125	Mason (for plain stone work) 2nd class	Day	0.0900	444.0	39.96	1.4580	647.35
0126	Mason (for Ornamental stone work) 1st class	Day	0.0900	474.0	42.66	1.4580	691.09
0115	Coolie	Day	2.3700	300.0	711.0	38.3940	11518.2
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	1.6200	2660.95
0367	Portland Cement	tonne	0.4000	6627.88	2651.15	6.4800	42948.66
0982	Coarse sand (zone III)	cum	0.4300	448.67	192.93	6.9660	3125.44
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.2800	972.28	272.24	4.5360	4410.26
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.5700	1313.33	748.6	9.2340	12127.29
Total Quantity					16.2000 cum		
Total Deducted Quantity					0.0000 cum		

Net Total Quantity	16.20 cum
Say 16.2000 cum @ (₹) 5130.437104 / cum	83113.08
Unskilled wage	11518.20
Unskilled Person-days	38.394000000000005

7	79.04.300 -- False work for R.C.C. and P.C.C. work in plinth and foundation False work for R.C.C. and P.C.C. work in plinth and foundation							
---	--	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
-------	-------------	----	---	---	---	----	----------	--------

false work								
------------	--	--	--	--	--	--	--	--

1	FOOTING	32	1.100		0.150	1.0	5.2800	-
2	COLUMN	16	0.200		0.900	1.0	2.8800	-
3	.	16	0.300		0.900	1.0	4.3200	-
4	LW PB OUTER	2	8.000		0.300	1.0	4.8000	-
5	SW OUTER	2	4.000		0.300	1.0	2.4000	-
6	INNER LW PB	2	7.600		0.300	1.0	4.5600	-
7	SW	2	3.600		0.300	1.0	2.1600	-

LIST								
-------------	--	--	--	--	--	--	--	--

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0112	Carpenter 2nd class	Day	0.1488	444.0	66.07	3.9286	1744.29
0115	Coolie	Day	0.1488	300.0	44.64	3.9286	1178.57
1197	Second class kail wood in scantling	10 cud m	0.0321	5200.43	167.16	0.8486	4412.94

Total Quantity	26.4000 sqm
----------------	-------------

Total Deducted Quantity	0.0000 sqm
-------------------------	------------

Net Total Quantity	26.40 sqm
--------------------	-----------

Say 26.4000 sqm @ (₹) 288.985769 / sqm	7629.22
--	---------

Unskilled wage	1178.57
----------------	---------

Unskilled Person-days	3.9285714159999996
-----------------------	--------------------

8	79.06.26 -- Add for Fly Ash brick in item no.0603 and 0605							
---	---	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
-------	-------------	----	---	---	---	----	----------	--------

brick work								
------------	--	--	--	--	--	--	--	--

1	LW	2	8.000	0.200	0.300	1.0	0.9600	-
2	SW	2	3.600	0.200	0.300	1.0	0.4320	-
3	STEP	2	2.500	0.600	0.200	1.0	0.6000	-

4	.	2	2.500	0.300	0.200	1.0	0.3000	-
deduction								
5	column excavation	8	0.200	0.300	0.300	1.0	-0.1440	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7737	Fly ash lime bricks (FALG Bricks) conforming to I.S. 12894	1000 nos	520.0000	3.95	2054.0	1116.9600	4411.99	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	-520.0000	3.65	-1900.41	-1116.9600	-4082.09	
Total Quantity					2.2920 cum			
Total Deducted Quantity					-0.1440 cum			
Net Total Quantity					2.15 cum			
Say 2.1480 cum @ (₹) 159.730688 / cum					343.10			
9	79.06.05j -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
brick work								
1	bw	1	2.150			1.0	2.1500	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	1118.0000	4085.89	
0115	Coolie	Day	1.8890	300.0	566.7	4.0614	1218.4	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.0226	37.08	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.1129	748.12	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	0.4831	208.43	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	0.8385	372.29	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	0.8385	397.45	
Total Quantity					2.1500 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					2.15 cum			

Say 2.1500 cum @ (₹) 3418.779465 / cum	7350.38
Unskilled wage	1218.41
Unskilled Person-days	4.06135

10	79.09.02 -- Steel work welded in built up sections, framed work, including cutting hoisting fixing in position in gratings, frames, guard bars, ladders, railing, brackets and similar works & trusses and trussed purlins up to 25m span and 15 m over all height							
----	---	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
-------	-------------	----	---	---	---	----	----------	--------

channel								
---------	--	--	--	--	--	--	--	--

1	channel	6	2.000		4.270	1.0	51.2400	-
---	---------	---	-------	--	-------	-----	---------	---

LIST								
-------------	--	--	--	--	--	--	--	--

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7144	Iron - M.S. flats	quintal	0.0067	6800.0	45.23	0.3408	2317.55
1004	Average rate of mild steel round bars for reinforcements	quintal	0.0039	6579.38	25.35	0.1974	1299.02
1215	Welding by electric plant	cm	2.7523	12.0	33.03	141.0275	1692.33
0115	Coolie	Day	0.0344	300.0	10.32	1.7628	528.85
0102	Blacksmith 1st class	Day	0.0321	474.0	15.22	1.6453	779.88

Total Quantity	51.2400 kg
----------------	------------

Total Deducted Quantity	0.0000 kg
-------------------------	-----------

Net Total Quantity	51.24 kg
--------------------	----------

Say 51.2400 kg @ (₹) 134.315901 / kg	6882.35
--------------------------------------	---------

Unskilled wage	528.85
----------------	--------

Unskilled Person-days	1.7628440508000003
-----------------------	--------------------

11	79.09.04b -- Providing and placing in position tested steel for R.C.C. work including cutting, bending, binding etc. as per drawings and placing in position complete up to floor two level including cost of binding wire and all wastage etc. complete. (b) Cold twisted / Hot rolled deformed / Thermo mechanically treated steel bars							
----	--	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
-------	-------------	----	---	---	---	----	----------	--------

iron								
------	--	--	--	--	--	--	--	--

1	iron	1	16.200	1.100	78.500	1.0	1398.8700	-
---	------	---	--------	-------	--------	-----	-----------	---

LIST								
-------------	--	--	--	--	--	--	--	--

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
1005	Twisted steel/deformed bars	quintal	0.0105	6577.0	69.06	14.6881	96603.86
7335	Binding wire	kilogram	0.0100	75.84	0.76	13.9887	1060.9
0115	Coolie	Day	0.0100	300.0	3.0	13.9887	4196.61

0102	Blacksmith 1st class	Day	0.0100	474.0	4.74	13.9887	6630.64	
Total Quantity					1398.8700 kg			
Total Deducted Quantity					0.0000 kg			
Net Total Quantity					1398.87 kg			
Say 1398.8700 kg @ (₹) 80.659176 / kg					112831.70			
Unskilled wage					4196.61			
Unskilled Person-days					13.9887			
12	79.10.07d -- 15mm thick cement plaster on rough side of wall in (d) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
plaster work								
1	OUTER LW	2	8.000		0.600	1.0	9.6000	-
2	SW	2	4.000		0.600	1.0	4.8000	-
3	STEP	2	2.500		0.300	1.0	1.5000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0367	Portland Cement	tonne	0.0043	6627.88	28.17	0.0676	447.88	
0124	Mason (brick layer)2nd class	Day	0.0830	444.0	36.85	1.3197	585.95	
MR7129	Scaffoldings (L.S.)	sqm	0.5351	11.0	5.89	8.5081	93.59	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0009	1642.56	1.4	0.0135	22.2	
0983	Fine sand (zone IV)	cum	0.0182	431.44	7.85	0.2892	124.78	
0115	Coolie	Day	0.1963	300.0	58.89	3.1212	936.35	
Total Quantity					15.9000 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					15.90 sqm			
Say 15.9000 sqm @ (₹) 144.602286 / sqm					2299.18			
Unskilled wage					936.35			
Unskilled Person-days					3.1211699999999998			
13	79.12.20b -- Cement concrete flooring 1:2:4 (1cement, 2sand, 4graded stone aggregate, 20mm nominal size) laid in one layer and finished with floating coat of neat cement. (b) 50 mm thick. Cement concrete flooring 1:2:4 (1cement, 2sand, 4graded stone aggregate, 20mm nominal size) laid in one layer and finished with floating coat of neat cement. (b) 50 mm thick.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
flooring work								

1	FLOOR	1	7.600	3.600		1.0	27.3600	-
2	STEP	4	2.500	0.300		1.0	3.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2430	300.0	72.9	7.3775	2213.24	
0125	Mason (for plain stone work) 2nd class	Day	0.1350	444.0	59.94	4.0986	1819.78	
0367	Portland Cement	tonne	0.0180	6627.88	119.3	0.5465	3622.0	
0982	Coarse sand (zone III)	cum	0.0220	448.67	9.87	0.6679	299.68	
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.0110	972.28	10.7	0.3340	324.7	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.0330	1313.33	43.34	1.0019	1315.8	
Total Quantity					30.3600 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					30.36 sqm			
Say 30.3600 sqm @ (₹) 328.689452 / sqm					9979.01			
Unskilled wage					2213.24			
Unskilled Person-days					7.37748			
14	79.13.18a -- Snowcem or durocem painting of any shade (a) 2 coats on new work							
SI No	Description	No	L	B	D	CF	Quantity	Remark
paint work								
1	AS PER PLASTER AREA	1	15.900			1.0	15.9000	-
2	CELLING and colun	1	52.960			1.0	52.9600	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7081	Snowcem or durocem	tonne	0.0002	34294.88	7.2	0.0145	495.92	
0141	White Washer	Day	0.0400	444.0	17.76	2.7544	1222.95	
Total Quantity					68.8600 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					68.86 sqm			
Say 68.8600 sqm @ (₹) 25.960402 / sqm					1787.63			

15	79.13.35a -- Painting with enamel paint, brushing, interior to give an even shade I/n cleaning the surface of all dirt dust and other foreign matter on steel and other metal surfaces. (a) 3 coats							
SI No	Description	No	L	B	D	CF	Quantity	Remark
iron paint								
1	iron paint	1	6.000	1.500	0.200	1.0	1.8000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7213	Brushes (L.S.)	each	0.5970	11.2	6.69	1.0746	12.04	
0115	Coolie	Day	0.0840	300.0	25.2	0.1512	45.36	
0131	Painter	Day	0.0840	474.0	39.82	0.1512	71.67	
8507	Textured exterior paint	Litre	0.2400	350.02	84.0	0.4320	151.21	
Total Quantity						1.8000 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						1.80 sqm		
Say 1.8000 sqm @ (₹) 161.935488 / sqm						291.48		
Unskilled wage						45.36		
Unskilled Person-days						0.1512		
Heading / Description: 2 - waiting hall								
1	79.01.01 -- Site clearance, cutting grass, raking into heaps and removing off the premises							
SI No	Description	No	L	B	D	CF	Quantity	Remark
site clearace								
1	Sc	1	7.000	5.000		1.0	35.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	0.0108	300.0	3.24	0.3780	113.4	
Total Quantity						35.0000 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						35.00 sqm		
Say 35.0000 sqm @ (₹) 3.3696 / sqm						117.94		
Unskilled wage						113.40		
Unskilled Person-days						0.378		

2	79.03.07b -- Earth work in excavation in trenches for foundations and for pipes, cables etc. not exceeding 1.5m in width and for shafts, cesspits and the like not exceeding 10sqm on plan including dressing of sides and ramming of bottoms lift upto 1.5m including gett (b) Dense or hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
earth work								
1	COLUMN	6	1.200	1.200	1.200	1.0	10.3680	-
2	LW	2	6.400	0.300	0.200	1.0	0.7680	-
3	SW	2	4.000	0.300	0.200	1.0	0.4800	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.6670	300.0	200.1	7.7479	2324.36	
Total Quantity					11.6160 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					11.62 cum			
Say 11.6160 cum @ (₹) 208.104 / cum					2417.34			
Unskilled wage					2324.36			
Unskilled Person-days					7.7478720000000001			
3	79.04.02 -- Filling foundation and around masonry work with moorum l/c ramming layers and watering.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
moorum filling								
1	floor	1	6.000	4.000	0.500	1.0	12.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2360	300.0	70.8	2.8320	849.6	
0810	Moorum	cum	1.0000	277.79	277.79	12.0000	3333.48	
Total Quantity					12.0000 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					12.00 cum			
Say 12.0000 cum @ (₹) 362.5336 / cum					4350.40			
Unskilled wage					849.60			
Unskilled Person-days					2.832			
4	79.04.28 -- False work for lintels slabs, columns, walls, sills, chhajjas balconies, beams, stair cases or ornamental moulded work, curved surface etc. cast in situ including all lead and lift							

SI No	Description	No	L	B	D	CF	Quantity	Remark
FALSE work								
1	COL UP TO TOP	12	0.200		3.000	1.0	7.2000	-
2	.	12	0.300		3.000	1.0	10.8000	-
3	LW OUTER LB	2	6.400		0.200	1.0	2.5600	-
4	.	2	4.400		0.200	1.0	1.7600	-
5	INNER LW	2	6.000		0.200	1.0	2.4000	-
6	.	2	4.000		0.200	1.0	1.6000	-
7	SB LW OUTER	2	6.400		0.200	1.0	2.5600	-
8	.	2	4.000		0.200	1.0	1.6000	-
9	INNER	2	6.000		0.200	1.0	2.4000	-
10	.	2	4.000		0.200	1.0	1.6000	-
11	T BEAM	2	4.000		0.350	1.0	2.8000	-
12	.	1	4.000	0.200		1.0	0.8000	-
13	CHHAJJA	2	6.400	0.600		1.0	7.6800	-
14	.	2	4.000	0.600		1.0	4.8000	-
15	PLAT FORM	2	4.000	0.600		1.0	4.8000	-
16	.	1	6.000	0.600		1.0	3.6000	-
17	MAIN SLAB	1	6.000	4.000		1.0	24.0000	-
18	PROJ.	2	6.400	0.300		1.0	3.8400	-
19	.	2	4.400	0.300		1.0	2.6400	-
20	.	1	21.600	0.100		1.0	2.1600	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7059	WOOD - Ballies Sal - 80mm dia (2.5m to 3.0m long)	meter	0.5133	138.43	71.06	47.0213	6509.16
1197	Second class kail wood in scantling	10 cud m	0.0300	5200.43	156.01	2.7480	14290.78
0115	Coolie	Day	0.2000	300.0	60.0	18.3200	5496.0
0112	Carpenter 2nd class	Day	0.2300	444.0	102.12	21.0680	9354.19
Total Quantity					91.6000 sqm		
Total Deducted Quantity					0.0000 sqm		
Net Total Quantity					91.60 sqm		

Say 91.6000 sqm @ (₹) 404.761347 / sqm						37076.14		
Unskilled wage						5496.00		
Unskilled Person-days						18.32		
5	79.04.13b -- Providing and laying in foundation, plinth and under floors cement concrete with 40mm nominal size graded stone aggregates (metal) i/c ramming in layers and curing complete excluding cost of form work (b) C.C. 1:3:6 (1cement, 3sand, 6metal)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
base work								
1	COLUMN	6	1.200	1.200	0.150	1.0	1.2960	-
2	FLOOR	1	6.000	4.000	0.100	1.0	2.4000	-
3	LW	2	6.400	0.300	0.100	1.0	0.3840	-
4	SW	2	4.000	0.200	0.100	1.0	0.1600	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	0.0400	444.0	17.76	0.1696	75.3	
0124	Mason (brick layer)2nd class	Day	0.0500	444.0	22.2	0.2120	94.13	
0123	Mason (brick layer) 1st class	Day	0.0500	474.0	23.7	0.2120	100.49	
0115	Coolie	Day	1.9000	300.0	570.0	8.0560	2416.8	
0367	Portland Cement	tonne	0.2200	6627.88	1458.13	0.9328	6182.49	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	0.4240	696.45	
0982	Coarse sand (zone III)	cum	0.4700	448.67	210.87	1.9928	894.11	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.2400	1313.33	315.2	1.0176	1336.44	
0293	Stone Aggregate(single size): 40 mm nominal size	cum	0.6500	1149.4	747.11	2.7560	3167.75	
Total Quantity						4.2400 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						4.24 cum		
Say 4.2400 cum @ (₹) 3670.403048 / cum						15562.51		
Unskilled wage						2416.80		
Unskilled Person-days						8.056000000000001		
6	79.04.25b -- Providing and placing in position RCC for roof, beams, columns column footing lintels chhajjas, balcony, stairs etc, excluding cost of reinforcement & centring but including finishing & curing. (b) CC 1:1.5:3 (1cement, 1.5sand, 3graded stone aggregate 20 mm nominal size)							

SI No	Description	No	L	B	D	CF	Quantity	Remark
rcc work								
1	FOOTING	6	1.100	0.100	0.150	1.0	0.0990	-
2	TP	6	0.325			1.0	1.9500	-
3	COL,UP TO PLINTH	6	0.200	0.300	0.800	1.0	0.2880	-
4	COL.UP TO SLAB	6	0.200	0.300	3.000	1.0	1.0800	-
5	PB LW	2	6.400	0.200	0.300	1.0	0.7680	-
6	SW	2	4.000	0.200	0.300	1.0	0.4800	-
7	LB LW	2	6.400	0.200	0.200	1.0	0.5120	-
8	SW	2	4.000	0.200	0.200	1.0	0.3200	-
9	SB LW	2	6.400	0.200	0.200	1.0	0.5120	-
10	.	2	4.000	0.200	0.200	1.0	0.3200	-
11	T BEAM	1	4.000	0.200	0.350	1.0	0.2800	-
12	PLAT FORM	2	4.000	0.600	0.100	1.0	0.4800	-
13	.	1	6.000	0.600	0.100	1.0	0.3600	-
14	CHAJJA	2	7.200	0.600	0.100	1.0	0.8640	-
15	.	2	4.000	0.600	0.100	1.0	0.4800	-
16	MAIN SLAB	1	7.000	5.000	0.110	1.0	3.8500	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7129	Scaffoldings (L.S.)	sqm	6.8000	11.0	74.8	85.9724	945.7
0128	Mate	Day	0.0800	444.0	35.52	1.0114	449.08
0125	Mason (for plain stone work) 2nd class	Day	0.0900	444.0	39.96	1.1379	505.21
0126	Mason (for Ornamental stone work) 1st class	Day	0.0900	474.0	42.66	1.1379	539.35
0115	Coolie	Day	2.3700	300.0	711.0	29.9639	8989.17
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	1.2643	2076.69
0367	Portland Cement	tonne	0.4000	6627.88	2651.15	5.0572	33518.51
0982	Coarse sand (zone III)	cum	0.4300	448.67	192.93	5.4365	2439.19
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.2800	972.28	272.24	3.5400	3441.91

0295	Stone Aggregate(single size):20 mm nominal size	cum	0.5700	1313.33	748.6	7.2065	9464.53	
Total Quantity					12.6430 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					12.64 cum			
Say 12.6430 cum @ (₹) 5130.437104 / cum					64864.12			
Unskilled wage					8989.17			
Unskilled Person-days					29.963910000000002			
7	79.04.300 -- False work for R.C.C. and P.C.C. work in plinth and foundation False work for R.C.C. and P.C.C. work in plinth and foundation							
SI No	Description	No	L	B	D	CF	Quantity	Remark
false work								
1	FOOTING	24	1.100		0.150	1.0	3.9600	-
2	COLUMN	12	0.200		0.800	1.0	1.9200	-
3	.	12	0.300		0.800	1.0	2.8800	-
4	PB OUTER LW	2	6.400		0.300	1.0	3.8400	-
5	SW	2	4.400		0.300	1.0	2.6400	-
6	PB INNER LW	2	6.000		0.300	1.0	3.6000	-
7	.	2	4.000		0.300	1.0	2.4000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0112	Carpenter 2nd class	Day	0.1488	444.0	66.07	3.1607	1403.36	
0115	Coolie	Day	0.1488	300.0	44.64	3.1607	948.21	
1197	Second class kail wood in scantling	10 cud m	0.0321	5200.43	167.16	0.6827	3550.41	
Total Quantity					21.2400 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					21.24 sqm			
Say 21.2400 sqm @ (₹) 288.985769 / sqm					6138.06			
Unskilled wage					948.21			
Unskilled Person-days					3.1607142755999997			
8	79.06.26 -- Add for Fly Ash brick in item no.0603 and 0605							
SI No	Description	No	L	B	D	CF	Quantity	Remark

brick work								
1	below brickwork	2	6.400	0.200	0.300	1.0	0.7680	-
2	.	2	4.000	0.200	0.300	1.0	0.4800	-
deduction								
3	column	6	0.200	0.300	0.300	1.0	-0.1080	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7737	Fly ash lime bricks (FALG Bricks) conforming to I.S. 12894	1000 nos	520.0000	3.95	2054.0	592.8000	2341.56	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	-520.0000	3.65	-1900.41	-592.8000	-2166.47	
Total Quantity					1.2480 cum			
Total Deducted Quantity					-0.1080 cum			
Net Total Quantity					1.14 cum			
Say 1.1400 cum @ (₹) 159.730688 / cum					182.09			
9	79.06.05j -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
brick work								
1	-	1	1.140			1.0	1.1400	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	592.8000	2166.47	
0115	Coolie	Day	1.8890	300.0	566.7	2.1535	646.04	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.0120	19.66	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.0598	396.68	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	0.2562	110.52	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	0.4446	197.4	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	0.4446	210.74	
Total Quantity					1.1400 cum			

Total Deducted Quantity							0.0000 cum	
Net Total Quantity							1.14 cum	
Say 1.1400 cum @ (₹) 3418.779465 / cum							3897.41	
Unskilled wage							646.04	
Unskilled Person-days							2.15346	
Heading / Description: 3 - waiting hall brick work above plinth								
1	79.06.06 -- Add for masonry in supper structure above plinth level up to floor two level							
SI No	Description	No	L	B	D	CF	Quantity	Remark
brick work								
1	ABOVE PB	2	6.400	0.200	1.200	1.0	3.0720	-
2	.	2	4.000	0.200	1.200	1.0	1.9200	-
3	ABOVE LB	2	6.400	0.200	0.700	1.0	1.7920	-
4	.	2	4.000	0.200	0.700	1.0	1.1200	-
deduction								
5	COLUMN	6	0.200	0.300	1.200	1.0	-0.4320	-
6	.	6	0.200	0.300	0.700	1.0	-0.2520	-
7	gate	1	1.200	0.200	1.200	1.0	-0.2880	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7129	Scaffoldings (L.S.)	sqm	6.4040	11.0	70.44	44.3925	488.32	
0115	Coolie	Day	0.3100	300.0	93.0	2.1489	644.68	
0124	Mason (brick layer)2nd class	Day	0.0800	444.0	35.52	0.5546	246.22	
0123	Mason (brick layer) 1st class	Day	0.0800	474.0	37.92	0.5546	262.86	
Total Quantity						7.9040 cum		
Total Deducted Quantity						-0.9720 cum		
Net Total Quantity						6.93 cum		
Say 6.9320 cum @ (₹) 246.35936 / cum						1707.76		
Unskilled wage						644.68		
Unskilled Person-days						2.14892		
2	79.06.26 -- Add for Fly Ash brick in item no.0603 and 0605							
SI No	Description	No	L	B	D	CF	Quantity	Remark

brick work								
1	brick work	1	6.930			1.0	6.9300	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
7737	Fly ash lime bricks (FALG Bricks) conforming to I.S. 12894	1000 nos	520.0000	3.95	2054.0	3603.6000	14234.22	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	-520.0000	3.65	-1900.41	-3603.6000	-13169.86	
Total Quantity					6.9300 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					6.93 cum			
Say 6.9300 cum @ (₹) 159.730688 / cum					1106.93			
3	79.06.05j -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
brick work								
1	brick work	1	6.930			1.0	6.9300	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	3603.6000	13169.86	
0115	Coolie	Day	1.8890	300.0	566.7	13.0908	3927.23	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.0728	119.52	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.3638	2411.39	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	1.5572	671.83	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	2.7027	1200.0	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	2.7027	1281.08	
Total Quantity					6.9300 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					6.93 cum			
Say 6.9300 cum @ (₹) 3418.779465 / cum					23692.14			

Unskilled wage							3927.23	
Unskilled Person-days							13.0907700000000001	
4	79.09.22 -- Providing and fixing M.S. grills of required pattern to wooden frames of windows etc. with M.S. flats at required spacing and frame around, round or square bars with round headed bolts and nuts or by screws.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
MS FLATES								
1	1.20X1.20	1	40.000			1.0	40.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
1215	Welding by electric plant	cm	0.2451	12.0	2.94	9.8058	117.67	
1004	Average rate of mild steel round bars for reinforcements	quintal	0.0089	6579.38	58.38	0.3549	2335.08	
0115	Coolie	Day	0.0593	300.0	17.8	2.3732	711.97	
0102	Blacksmith 1st class	Day	0.0464	474.0	21.99	1.8554	879.48	
MR7144	Iron - M.S. flats	quintal	0.0022	6800.0	14.67	0.0863	586.84	
Total Quantity					40.0000 kg			
Total Deducted Quantity					0.0000 kg			
Net Total Quantity					40.00 kg			
Say 40.0000 kg @ (₹) 120.407094 / kg					4816.28			
Unskilled wage					711.97			
Unskilled Person-days					2.3732470666666665			
5	79.09.04b -- Providing and placing in position tested steel for R.C.C. work including cutting, bending, binding etc. as per drawings and placing in position complete up to floor two level including cost of binding wire and all wastage etc. complete. (b) Cold twisted / Hot rolled deformed / Thermo mechanically treated steel bars							
SI No	Description	No	L	B	D	CF	Quantity	Remark
IRON								
1	IRON	1	12.640	1.100	78.500	1.0	1091.4640	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
1005	Twisted steel/deformed bars	quintal	0.0105	6577.0	69.06	11.4604	75374.87	
7335	Binding wire	kilogram	0.0100	75.84	0.76	10.9146	827.77	
0115	Coolie	Day	0.0100	300.0	3.0	10.9146	3274.39	
0102	Blacksmith 1st class	Day	0.0100	474.0	4.74	10.9146	5173.54	

Total Quantity							1091.4640 kg	
Total Deducted Quantity							0.0000 kg	
Net Total Quantity							1091.46 kg	
Say 1091.4640 kg @ (₹) 80.659176 / kg							88036.59	
Unskilled wage							3274.39	
Unskilled Person-days							10.914639999999999	
6	79.10.07d -- 15mm thick cement plaster on rough side of wall in (d) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
PLASTER work								
1	OUTER LW	2	6.400		1.800	1.0	23.0400	-
2	SW	2	4.400		1.800	1.0	15.8400	-
3	.	2	6.400		1.100	1.0	14.0800	-
4	.	2	4.400		1.100	1.0	9.6800	-
5	INNER	2	6.000		1.200	1.0	14.4000	-
6	.	2	4.000		1.200	1.0	9.6000	-
7	.	2	6.000		1.000	1.0	12.0000	-
8	.	2	4.000		1.000	1.0	8.0000	-
deduction								
9	GATE	1	1.200		1.200	1.0	-1.4400	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0367	Portland Cement	tonne	0.0043	6627.88	28.17	0.4471	2963.33	
0124	Mason (brick layer)2nd class	Day	0.0830	444.0	36.85	8.7316	3876.83	
MR7129	Scaffoldings (L.S.)	sqm	0.5351	11.0	5.89	56.2925	619.22	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0009	1642.56	1.4	0.0894	146.88	
0983	Fine sand (zone IV)	cum	0.0182	431.44	7.85	1.9136	825.6	
0115	Coolie	Day	0.1963	300.0	58.89	20.6508	6195.23	
Total Quantity						106.6400 sqm		
Total Deducted Quantity						-1.4400 sqm		
Net Total Quantity						105.20 sqm		
Say 105.2000 sqm @ (₹) 144.602286 / sqm						15212.16		

Unskilled wage							6195.23	
Unskilled Person-days							20.65076	
7	79.12.20b -- Cement concrete flooring 1:2:4 (1cement, 2sand, 4graded stone aggregate, 20mm nominal size) laid in one layer and finished with floating coat of neat cement. (b) 50 mm thick. Cement concrete flooring 1:2:4 (1cement, 2sand, 4graded stone aggregate, 20mm nominal size) laid in one layer and finished with floating coat of neat cement. (b) 50 mm thick.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
FLOORING								
1	FLOOR	1	6.000	4.000		1.0	24.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2430	300.0	72.9	5.8320	1749.6	
0125	Mason (for plain stone work) 2nd class	Day	0.1350	444.0	59.94	3.2400	1438.56	
0367	Portland Cement	tonne	0.0180	6627.88	119.3	0.4320	2863.24	
0982	Coarse sand (zone III)	cum	0.0220	448.67	9.87	0.5280	236.9	
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.0110	972.28	10.7	0.2640	256.68	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.0330	1313.33	43.34	0.7920	1040.16	
Total Quantity						24.0000 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						24.00 sqm		
Say 24.0000 sqm @ (₹) 328.689452 / sqm						7888.55		
Unskilled wage						1749.60		
Unskilled Person-days						5.8320000000000001		
8	79.13.08 -- White washing whith lime on undecorated wall surfaces (two coats) to give an even shade including thoroughly broomed the surface to remove all dirt, dust, mortar drops and other foreign matter.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
WHITE WAHSING work								
1	AS PER PLASTER AREA	1	105.200			1.0	105.2000	-
2	CELLING AREA	1	24.000			1.0	24.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	

MR7211	Indigo gum (L.S.)	Packet	0.0622	11.0	0.68	8.0362	88.4	
0776	Satna lime	quintal	0.0020	680.71	1.36	0.2584	175.9	
0115	Coolie	Day	0.0070	300.0	2.1	0.9044	271.32	
0141	White Washer	Day	0.0130	444.0	5.77	1.6796	745.74	
Total Quantity					129.2000 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					129.20 sqm			
Say 129.2000 sqm @ (₹) 10.314325 / sqm					1332.61			
Unskilled wage					271.32			
Unskilled Person-days					0.9044			
9	79.13.18a -- Snowcem or durocem painting of any shade (a) 2 coats on new work							
SI No	Description	No	L	B	D	CF	Quantity	Remark
PAINT								
1	AS PER QUANTITY	1	129.200			1.0	129.2000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7081	Snowcem or durocem	tonne	0.0002	34294.88	7.2	0.0271	930.49	
0141	White Washer	Day	0.0400	444.0	17.76	5.1680	2294.59	
Total Quantity					129.2000 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					129.20 sqm			
Say 129.2000 sqm @ (₹) 25.960402 / sqm					3354.08			
Heading / Description: 4 - INTERLOCKING WORK								
1	79.04.04 -- Filling in plinth with sand under floors including watering, ramming, consolidating and dressing complete.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
SAND FILLING								
1	SAND	1	86.000	3.000	0.150	1.0	38.7000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2040	300.0	61.2	7.8948	2368.44	
0982	Coarse sand (zone III)	cum	1.0000	448.67	448.67	38.7000	17363.53	

Total Quantity						38.7000 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						38.70 cum		
Say 38.7000 cum @ (₹) 514.9687 / cum						19929.29		
Unskilled wage						2368.44		
Unskilled Person-days						7.894800000000002		
2	79.PWD.12.65.2 -- Providing and laying 60 mm thick precast interlocking concrete blocks of approved size (approx. 0.305 sqm) and shape/ pattern, over thick average complete coarse sand bed with joints of 3mm thick filled by fine sand including leveling with surface vibrator, temping and sweeping etc. complete of minimum compressive strength of 250 kg/sqm. (2) pigment coloured (rubber mould) precast interlock concrete block							
SI No	Description	No	L	B	D	CF	Quantity	Remark
INTERLOCKING work								
1	MD AROUND	2	14.000	3.000		1.0	84.0000	-
2	.	2	4.000	3.000		1.0	24.0000	-
3	APPROCH ROAD	1	25.000	4.000		1.0	100.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7218	sundries/ overhead charges (L.S.)	each	1.6800	11.7	19.66	349.4400	4088.45	
0022	Surface Vibrator	Day	0.0125	1235.32	15.44	2.6000	3211.83	
0115	Coolie	Day	0.1500	300.0	45.0	31.2000	9360.0	
0124	Mason (brick layer)2nd class	Day	0.0500	444.0	22.2	10.4000	4617.6	
0123	Mason (brick layer) 1st class	Day	0.0500	474.0	23.7	10.4000	4929.6	
0983	Fine sand (zone IV)	cum	0.0150	431.44	6.47	3.1200	1346.09	
0982	Coarse sand (zone III)	cum	0.0500	448.67	22.43	10.4000	4666.17	
MR7253	Coloured Interlocking CC paver block (60mmthick, M-25)	sqm	1.0000	470.0	470.0	208.0000	97760.0	
Total Quantity						208.0000 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						208.00 sqm		
Say 208.0000 sqm @ (₹) 631.151626 / sqm						131279.54		
Unskilled wage						9360.00		
Unskilled Person-days						31.2		
Heading / Description: 5 - transportation								


1	79.19.02j -- Transportation of metal - (j) 5.0 Km. Lead							
SI No	Description	No	L	B	D	CF	Quantity	Remark
TP								
1	brick	1	11.500			1.0	11.5000	-
2	cement	1	12.880			0.9	11.5920	-
3	TMT BAR	1	2.614			0.9	2.3530	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2311	300.0	69.34	5.8810	1764.29	
0084	Hire charges of Diesel truck - 9 tonne (without POL)	Day	0.0385	3574.28	137.68	0.9802	3503.37	
5001	Mobil oil	Litre	0.0158	319.2	5.04	0.4019	128.28	
1235	Diesel oil	Litre	0.4465	100.0	44.65	11.3601	1136.01	
Total Quantity					25.4450 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					25.45 cum			
Say 25.4450 cum @ (₹) 256.708475 / cum					6531.95			
Unskilled wage					1764.29			
Unskilled Person-days					5.880970705633334			
2	79.19.03a -- Add if Lead is more than 5.00Km (a) For every 0.5 Kms. Lead beyond 5 Kms. and part there of upto 10 Kms.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
TP								
1	brick	10	11.500			1.0	115.0000	-
2	cement	10	12.880			0.9	115.9200	-
3	TMT BAR	10	2.614			0.9	23.5260	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7216	Transportation deduction factor (L.S.)	each	-0.1620	9.0	-1.46	-41.2203	-370.98	
1235	Diesel oil	Litre	0.0415	100.0	4.15	10.5595	1055.95	
0115	Coolie	Day	0.0100	300.0	3.0	2.5445	763.34	

0084	Hire charges of Diesel truck - 9 tonne (without POL)	Day	0.0012	3574.28	4.22	0.3002	1073.16
5001	Mobil oil	Litre	0.0015	319.2	0.47	0.3766	120.2
Total Quantity					254.4460 cum		
Total Deducted Quantity					0.0000 cum		
Net Total Quantity					254.45 cum		
Say 254.4460 cum @ (₹) 10.382066 / cum					2641.68		
Unskilled wage					763.34		
Unskilled Person-days					2.5444600000000004		
6	Lump sum Type : Material	Display Board / CIB					5000.0
7	Lump sum Type : Material	BFT/TA/Mate					8402.0
8	Lump sum Type : Material	Miscellaneous /Contingencies charges					10000.0
Total (₹) :							771639.00
Rounded Total (₹) :							7,71,639.00
Rupees Seven Lakh Seventy One Thousand Six Hundred and Thirty Nine Only							
Unskilled Manpower wages							88486.47
Materials (Includes Extra Charges)							592156.52
Carriage							0.00
Skilled							22073.72
SemiSkilled							45520.28
Lumpsum Admin							0.00
Lumpsum Material							23402.00
No of Person days							294.95


Structural Drawing


कार्य का नाम :- प्रतिक्षालय निर्माण कार्य

ग्राम :- ग्राम पंचायत :- जनपद :- मोहला

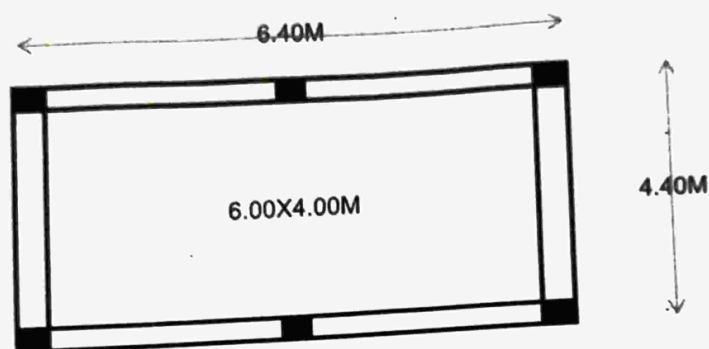


तकनीकी सहायक
जनपद ~~बल्लभपुर~~ मोहला
तकनीकी सहायक
जनपद पंचायत, मोहला

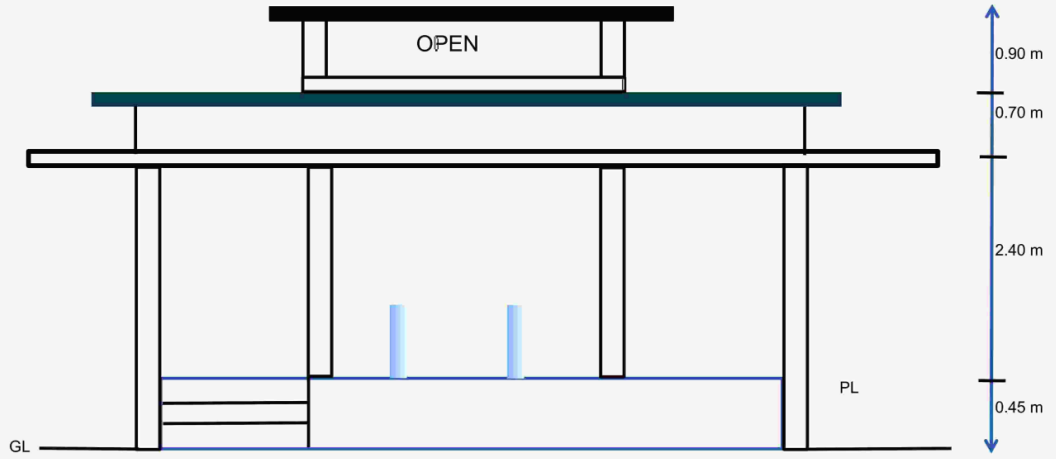




तकनीकी सहायक
जनपद पंचायत मोहला

विस्तृत मानचित्र

कार्य का नाम
ग्राम
ग्राम पंचायत

जनपद पंचायत

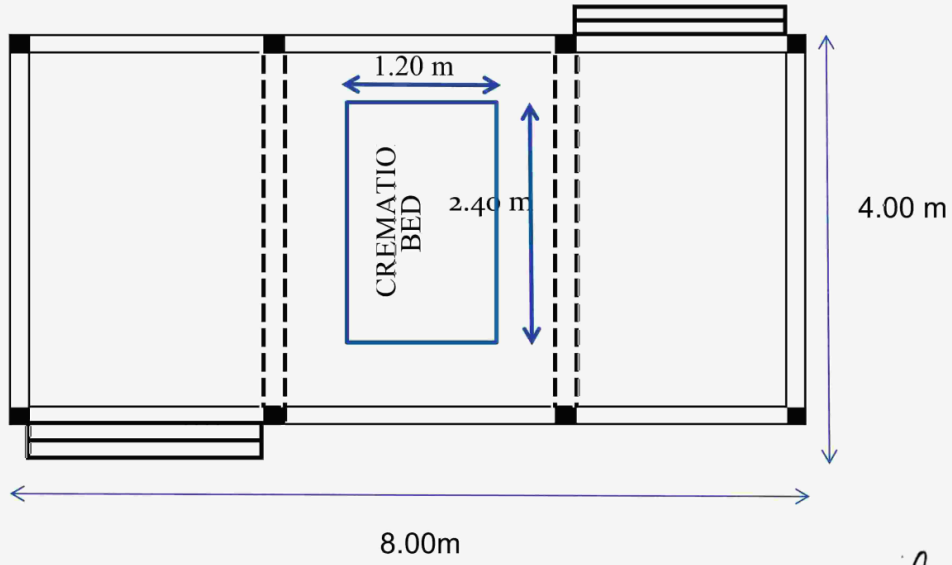


तकनीकी सहायक
जनपद पंचायत मोहला