

Detailed Estimate

SoR Period: 09/04/2026 - 09/04/2027 Created By: BASANT DHRUV
TS No:3304008029/2026-2027/36958/TS

Construction of Cattle Shelter for Community Urwahi

3304008029/AV/VB/YD/1111478363

BLOCK: Mohla, GRAMA PANCHAYAT : Uarwahi

Heading / Description: 1 - Construction of Cattle Shelter for Community								
1	79.03.01b -- Earth work in bulk excavation (exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated soil lead upto 50m and lift upto 1.5m, disposed soil to be levelled and neatly dressed. (b)Dense or hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
earth work								
1	Coloum	12	1.200	1.200	1.000	1.0	17.2800	-
2	boundry post	36	0.300	0.300	0.450	1.0	1.4580	-
3	Urin Tank	2	0.600	0.600	0.800	1.0	0.5760	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.6670	300.0	200.1	12.8824	3864.73	
Total Quantity						19.3140 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						19.31 cum		
Say 19.3140 cum @ (₹) 208.104 / cum						4019.32		
Unskilled wage						3864.73		
Unskilled Person-days						12.882438		
2	79.04.02 -- Filling foundation and around masonry work with moorum l/c ramming layers and watering.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
murum filling								
1	Shed Floor	1	14.800	7.600	0.300	1.0	33.7440	-

SI No	Description	No	L	B	D	CF	Quantity	Remark
base work								
1	Coloum for post	12	1.200	1.200	0.150	1.0	2.5920	-
2	shed floor top	1	15.000	8.000	0.100	1.0	12.0000	-
3	open yard base	1	25.000	6.000	0.100	2.0	30.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	0.0400	444.0	17.76	1.7837	791.95	
0124	Mason (brick layer)2nd class	Day	0.0500	444.0	22.2	2.2296	989.94	
0123	Mason (brick layer) 1st class	Day	0.0500	474.0	23.7	2.2296	1056.83	
0115	Coolie	Day	1.9000	300.0	570.0	84.7248	25417.44	
0367	Portland Cement	tonne	0.2200	6627.88	1458.13	9.8102	65021.09	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	4.4592	7324.5	
0982	Coarse sand (zone III)	cum	0.4700	448.67	210.87	20.9582	9403.33	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.2400	1313.33	315.2	10.7021	14055.36	
0293	Stone Aggregate(single size): 40 mm nominal size	cum	0.6500	1149.4	747.11	28.9848	33315.13	
Total Quantity					44.5920 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					44.59 cum			
Say 44.5920 cum @ (₹) 3670.403048 / cum					163670.61			
Unskilled wage					25417.44			
Unskilled Person-days					84.7248			
5	79.04.25b -- Providing and placing in position RCC for roof, beams, columns column footing lintels chhajjas, balcony, stairs etc, excluding cost of reinforcement & centring but including finishing & curing. (b) CC 1:1.5:3 (1cement, 1.5sand, 3graded stone aggregate 20 mm nominal size)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
rcc work								
1	footing post	12	1.100	1.100	0.300	1.0	4.3560	-
2	stool coloum	12	0.200	0.300	0.600	0.22	0.0950	-
3	Plinth LW	2	15.000	0.200	0.200	1.0	1.2000	-
4	SW	2	7.600	0.200	0.200	1.0	0.6080	-

5	above plinth	12	0.200	0.300	0.750	1.0	0.5400	-
6	DRAIN FLOOR	2	15.000	0.100	0.080	1.0	0.2400	-
7	URIN TANK	2	0.600	0.600	0.080	1.0	0.0580	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7129	Scaffoldings (L.S.)	sqm	6.8000	11.0	74.8	48.2596	530.86
0128	Mate	Day	0.0800	444.0	35.52	0.5678	252.09
0125	Mason (for plain stone work) 2nd class	Day	0.0900	444.0	39.96	0.6387	283.6
0126	Mason (for Ornamental stone work) 1st class	Day	0.0900	474.0	42.66	0.6387	302.76
0115	Coolie	Day	2.3700	300.0	711.0	16.8199	5045.97
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	0.7097	1165.72
0367	Portland Cement	tonne	0.4000	6627.88	2651.15	2.8388	18815.23
0982	Coarse sand (zone III)	cum	0.4300	448.67	192.93	3.0517	1369.21
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.2800	972.28	272.24	1.9872	1932.08
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.5700	1313.33	748.6	4.0453	5312.8
Total Quantity					7.0970 cum		
Total Deducted Quantity					0.0000 cum		
Net Total Quantity					7.10 cum		
Say 7.0970 cum @ (₹) 5130.437104 / cum					36410.71		
Unskilled wage					5045.97		
Unskilled Person-days					16.819889999999997		

6 **79.04.300** -- False work for R.C.C. and P.C.C. work in plinth and foundation
False work for R.C.C. and P.C.C. work in plinth and foundation

SI No	Description	No	L	B	D	CF	Quantity	Remark
FALSE WORK								
1	footing post	12	1.100		0.300	4.0	15.8400	-
2	stool coloum	12	0.200		0.600	2.0	2.8800	-
3	Plinth LW	2	15.000		0.200	2.0	12.0000	-
4	SW	2	7.600		0.200	1.0	3.0400	-
5	above plinth	12	0.200		0.750	1.0	1.8000	-

6	DRAIN FLOOR	2	15.000		0.080	1.0	2.4000	-
7	URIN TANK	2	0.600		0.100	2.0	0.2400	-
8	.	2	0.600		0.100	2.0	0.2400	-
9	DRAIN SIDE	2	15.000		0.100	2.0	6.0000	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0112	Carpenter 2nd class	Day	0.1488	444.0	66.07	6.6131	2936.21
0115	Coolie	Day	0.1488	300.0	44.64	6.6131	1983.93
1197	Second class kail wood in scantling	10 cud m	0.0321	5200.43	167.16	1.4284	7428.44

Total Quantity 44.4400 sqm

Total Deducted Quantity 0.0000 sqm

Net Total Quantity 44.44 sqm

Say 44.4400 sqm @ (₹) 288.985769 / sqm 12842.53

Unskilled wage 1983.93

Unskilled Person-days 6.613095216933332

7 **79.06.05j** -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)

SI No	Description	No	L	B	D	CF	Quantity	Remark
-------	-------------	----	---	---	---	----	----------	--------

brick work

1	LW	2	15.000	0.200	0.200	1.0	1.2000	-
2	SW	2	7.600	0.200	0.200	1.0	0.6080	-
3	Urin Tank	2	0.600	0.100	0.600	1.0	0.0720	-
4	SW	2	0.400	0.100	0.600	1.0	0.0480	-
5	DRAIN FOR URINE	2	15.000	0.100	0.100	1.0	0.3000	-

deduction

6	GATE	12	0.200	0.200	0.300	1.0	-0.1440	-
---	------	----	-------	-------	-------	-----	---------	---

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	1083.6800	3960.46
0115	Coolie	Day	1.8890	300.0	566.7	3.9367	1181.0

0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.0219	35.94	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.1094	725.16	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	0.4683	202.03	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	0.8128	360.87	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	0.8128	385.25	
Total Quantity					2.2280 cum			
Total Deducted Quantity					-0.1440 cum			
Net Total Quantity					2.08 cum			
Say 2.0840 cum @ (₹) 3418.779465 / cum					7124.74			
Unskilled wage					1181.00			
Unskilled Person-days					3.936676			
8	79.09.02 -- Steel work welded in built up sections, framed work, including cutting hoisting fixing in position in gratings, frames, guard bars, ladders, railing, brackets and similar works & trusses and trussed purlins up to 25m span and 15 m over all height							
SI No	Description	No	L	B	D	CF	Quantity	Remark
iron work								
1	TIE BEAM MS 50MM	6	8.000	5.030		1.0	241.4400	ROUND PIPE 3.6MM
2	P.RAFTER MS 50MM	6	4.060	5.030		2.0	245.0620	ROUND PIPE 3.6MM
3	KINGPOST MS 40MM	6	0.600	3.560		1.0	12.8160	ROUND PIPE 3.2MM
4	VERTICAL POST 40MM	6	0.450	3.560		2.0	19.2240	ROUND PIPE 3.2MM
5	V POST MS 40MM	6	0.250	3.560		2.0	10.6800	ROUND PIPE 3.2MM
6	INCLIND MS 40MM	6	1.200	3.560		2.0	51.2640	ROUND PIPE 3.2MM
7	IN MS 40MM	6	0.750	3.560		2.0	32.0400	ROUND PIPE 3.2MM
8	MAIN VERTUCAL POST	12	2.700	6.420		1.0	208.0080	ROUND PIPE 365MM
9	PURLINE 50MM	7	15.600	5.030		2.0	1098.5520	-
10	WIND PATTI	5	15.600	0.500		2.0	78.0000	FLAT PATTI
11	FOR OUTER BOUNDRY	36	2.050	5.030		1.0	371.2140	POST 50MM
12	HF 40MM ANGLE	36	0.500	3.000		1.0	54.0000	-

13	HORIZONTAL BRACING	5	90.000	3.560		1.0	1602.0000	MS PIPE 32MM0.24CC
14	GATE	2	40.000			1.0	80.0000	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7144	Iron - M.S. flats	quintal	0.0067	6800.0	45.23	27.2992	185634.85
1004	Average rate of mild steel round bars for reinforcements	quintal	0.0039	6579.38	25.35	15.8147	104051.14
1215	Welding by electric plant	cm	2.7523	12.0	33.03	11296.2385	135554.86
0115	Coolie	Day	0.0344	300.0	10.32	141.2030	42360.89
0102	Blacksmith 1st class	Day	0.0321	474.0	15.22	131.7894	62468.2
Total Quantity					4104.3000 kg		
Total Deducted Quantity					0.0000 kg		
Net Total Quantity					4104.30 kg		
Say 4104.3000 kg @ (₹) 134.315901 / kg					551272.75		
Unskilled wage					42360.89		
Unskilled Person-days					141.20298278099997		

9 **79.09.04b** -- Providing and placing in position tested steel for R.C.C. work including cutting, bending, binding etc. as per drawings and placing in position complete up to floor two level including cost of binding wire and all wastage etc. complete. (b) Cold twisted / Hot rolled deformed / Thermo mechanically treated steel bars

SI No	Description	No	L	B	D	CF	Quantity	Remark
steel								
1	STEEL BAR	7.097	87.000			1.0	617.4390	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
1005	Twisted steel/deformed bars	quintal	0.0105	6577.0	69.06	6.4831	42639.41
7335	Binding wire	kilogram	0.0100	75.84	0.76	6.1744	468.27
0115	Coolie	Day	0.0100	300.0	3.0	6.1744	1852.32
0102	Blacksmith 1st class	Day	0.0100	474.0	4.74	6.1744	2926.66
Total Quantity					617.4390 kg		
Total Deducted Quantity					0.0000 kg		
Net Total Quantity					617.44 kg		
Say 617.4390 kg @ (₹) 80.659176 / kg					49802.12		

Unskilled wage						1852.32		
Unskilled Person-days						6.17439		
10	79.10.07d -- 15mm thick cement plaster on rough side of wall in (d) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
plasterr								
1	URIN TANK	4	0.600		0.600	2.0	2.8800	-
2	DRAIN	4	15.000		0.200	1.0	12.0000	-
3	LW	2	15.000		0.300	1.0	9.0000	-
4	SW	2	8.000		0.300	1.0	4.8000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0367	Portland Cement	tonne	0.0043	6627.88	28.17	0.1219	807.87	
0124	Mason (brick layer)2nd class	Day	0.0830	444.0	36.85	2.3804	1056.92	
MR7129	Scaffoldings (L.S.)	sqm	0.5351	11.0	5.89	15.3467	168.81	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0009	1642.56	1.4	0.0244	40.04	
0983	Fine sand (zone IV)	cum	0.0182	431.44	7.85	0.5217	225.08	
0115	Coolie	Day	0.1963	300.0	58.89	5.6299	1688.97	
Total Quantity						28.6800 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						28.68 sqm		
Say 28.6800 sqm @ (₹) 144.602286 / sqm						4147.19		
Unskilled wage						1688.97		
Unskilled Person-days						5.6298840000000006		
11	79.11.41 -- 0.50 मिमी +/- 5% कुल मोटाई (TCT) एवं 120 gm का प्रीकोटेड गैल्वनाइज प्रोफाइल शीट (IS-.277 के अनुसार 240 Mpa स्टील ग्रेड) जिसमें 5-7 माइक्रान इपाक्सी प्राइमर शीट के दोनों तरफ एवं पोलिस्टर की 15-18 माइक्रान की परत उपरी सतह पर हो, को उपलब्ध कराने एवं लगाने सहित । (आकार/प्रकार प्रभारी अभियंता से अनुमोदित) । शीट में कम से कम 25 माइक्रान की सुरक्षा परत लगी होनी चाहिये । परिवहन में लगने वाली खरोचों से बचाने के लिये । शीट को सेल्फ ड्रिलिंग/सेल्फ टैपिंग स्कू (आकार 5.5x55mm) से EPDM सील से लगाया जाये । दर में पर्लिन, राफ्टर एवं टूस की कीमत सम्मिलित नहीं है । सीट की कटाई सम्मिलित है ।							
SI No	Description	No	L	B	D	CF	Quantity	Remark
profile sheet								
1	PROFILE SHEET	1	15.600	4.000		2.0	124.8000	-
LIST								

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0115	Coolie	Day	0.0432	300.0	12.96	5.3929	1617.88
0112	Carpenter 2nd class	Day	0.0432	444.0	19.19	5.3929	2394.47
0130	Mistry	Day	0.0108	474.0	5.13	1.3511	640.43
1208	Bitumen washer	100 nos	0.4627	2.5	1.16	57.7404	144.35
1209	G.I. Plain washer thick	100 nos	0.4627	4.76	2.2	57.7404	274.84
MR7283	Fastener	no	0.4627	1.0	0.46	57.7404	57.74
8671	Precoated glavanished iron profile sheet 0.50 mm TCT	sqm	1.0810	560.0	605.37	134.9103	75549.79

Total Quantity	124.8000 sqm
Total Deducted Quantity	0.0000 sqm
Net Total Quantity	124.80 sqm
Say 124.8000 sqm @ (₹) 672.329253 / sqm	83906.69
Unskilled wage	1617.88
Unskilled Person-days	5.39294912

12	79.11.42 -- 0.50 मिमी +/- 5% कुल मोटाई (TCT) एवं 120 gm का प्रीकोटेड गैल्वनाइज 500 - 600 मिमी. चौड़ी प्रोफाइल शीट का रिज (IS-.277 के अनुसार 240 Mpa स्टील ग्रेड) जिसमें 5-7 माइक्रान इपाक्सी प्राइमर शीट के दोनों तरफ एवं पोलिस्टर की 15-18 माइक्रान की परत उपरी सतह पर हो, को उपलब्ध कराने एवं लगाने सहित । (आकार/प्रकार प्रभारी अभियंता से अनुमोदित) । शीट में कम से कम 25 माइक्रान की सुरक्षा परत लगी होनी चाहिये । परिवहन में लगने वाली खरोचों से बचाने के लिये । शीट को सेल्फ ड्रिलिंग/सेल्फ टैपिंग स्कू (आकार 5.5x55mm) से EPDM सील से लगाया जाये । दर में पर्लिन, राफटर एवं ट्रस की कीमत सम्मिलित नहीं है । सीट की कटाई सम्मिलित है ।						
----	---	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
ridge plan								
1	CAP DRAIN	1	15.200			1.0	15.2000	-

LIST								
-------------	--	--	--	--	--	--	--	--

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0115	Coolie	Day	0.0812	300.0	24.36	1.2341	370.22
0112	Carpenter 2nd class	Day	0.0272	444.0	12.09	0.4139	183.75
0130	Mistry	Day	0.0069	474.0	3.29	0.1053	49.93
MR7256	precoated galavanised steel plain ridges	meter	1.1441	460.0	526.27	17.3897	7999.26


Total Quantity	15.2000 meter
Total Deducted Quantity	0.0000 meter
Net Total Quantity	15.20 meter

Say 15.2000 meter @ (₹) 588.637941 / meter							8947.30	
Unskilled wage							370.22	
Unskilled Person-days							1.234059424	
13	79.12.20b -- Cement concrete flooring 1:2:4 (1cement, 2sand, 4graded stone aggregate, 20mm nominal size) laid in one layer and finished with floating coat of neat cement. (b) 50 mm thick. Cement concrete flooring 1:2:4 (1cement, 2sand, 4graded stone aggregate, 20mm nominal size) laid in one layer and finished with floating coat of neat cement. (b) 50 mm thick.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
flooring								
1	URIN TANK	2	0.600	0.600		1.0	0.7200	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.2430	300.0	72.9	0.1750	52.49	
0125	Mason (for plain stone work) 2nd class	Day	0.1350	444.0	59.94	0.0972	43.16	
0367	Portland Cement	tonne	0.0180	6627.88	119.3	0.0130	85.9	
0982	Coarse sand (zone III)	cum	0.0220	448.67	9.87	0.0158	7.11	
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.0110	972.28	10.7	0.0079	7.7	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.0330	1313.33	43.34	0.0238	31.2	
Total Quantity						0.7200 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						0.72 sqm		
Say 0.7200 sqm @ (₹) 328.689452 / sqm						236.66		
Unskilled wage						52.49		
Unskilled Person-days						0.17496		
14	79.13.35a -- Painting with enamel paint, brushing, interior to give an even shade I/n cleaning the surface of all dirt dust and other foreign matter on steel and other metal surfaces. (a) 3 coats							
SI No	Description	No	L	B	D	CF	Quantity	Remark
iron paint								
1	ANGLE	60	1.800	0.050		2.0	10.8000	-
2	POST	12	2.700	0.650		1.0	21.0600	-
3	PURLINE	14	15.600	0.050		2.0	21.8400	-
4	TRUSS TIE	6	8.000	0.050		2.0	4.8000	-


5	RAFTER	12	8.300	0.050		4.0	19.9200	-
6	POST	6	0.600	0.050		2.0	0.3600	-
7	POST	12	0.450	0.050		2.0	0.5400	-
8	POST	12	0.250	0.050		2.0	0.3000	-
9	INCLIND	1	12.000	0.050		2.0	1.2000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7213	Brushes (L.S.)	each	0.5970	11.2	6.69	48.2495	540.39	
0115	Coolie	Day	0.0840	300.0	25.2	6.7889	2036.66	
0131	Painter	Day	0.0840	474.0	39.82	6.7889	3217.93	
8507	Textured exterior paint	Litre	0.2400	350.02	84.0	19.3968	6789.27	
Total Quantity					80.8200 sqm			
Total Deducted Quantity					0.0000 sqm			
Net Total Quantity					80.82 sqm			
Say 80.8200 sqm @ (₹) 161.935488 / sqm					13087.63			
Unskilled wage					2036.66			
Unskilled Person-days					6.788880000000001			
2	Lump sum Type : Material	Display Board / CIB					5000.0	
Total (₹) :							999119.89	
Rounded Total (₹) :							9,99,120.00	
Rupees Nine Lakh Ninety Nine Thousand One Hundred and Twenty Only								
Unskilled Manpower wages							98789.58	
Materials (Includes Extra Charges)							814254.10	
Carriage							0.00	
Skilled							71047.99	
SemiSkilled							10028.22	
Lumpsum Admin							0.00	
Lumpsum Material							5000.00	
No of Person days							329.30	

Structural Drawing

CONSTRUCTION OF CATTLE SHELTER FOR COMMUNITY	
GRAM -	GRAM PANCHAYAT -

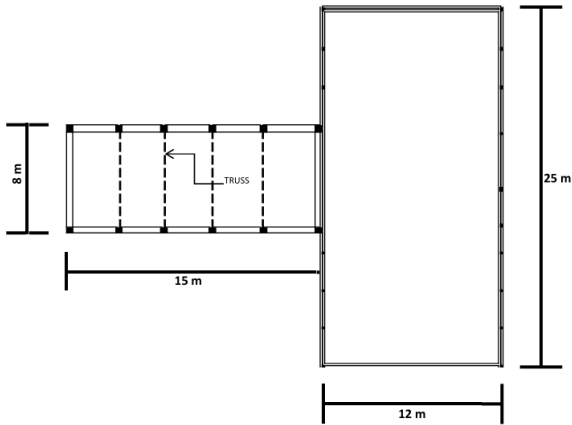

PLAN

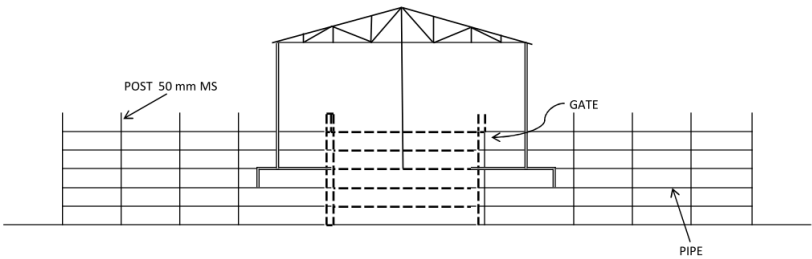

SECTION


TECHNICAL ASSISTANT
JANPAD PANCHAYAT MOHLA