

Detailed Estimate

SoR Period: 09/04/2026 - 09/04/2027 Created By: TULSI DEWANGAN

AS No:3304008047/2026-2027/28578/AS TS No:3304008047/2026-2027/28578/TS

Renovation of Community Water Harvesting Ponds for Community Gram Parwidih

3304008047/WH/1111591691

BLOCK: Mohla, GRAMA PANCHAYAT : Ramagarh

Heading / Description: 1 - Renovation of Community Water Harvesting Ponds for Community Gram Parwidih								
1	79.03.01b -- Earth work in bulk excavation (exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated soil lead upto 50m and lift upto 1.5m, disposed soil to be levelled and neatly dressed. (b)Dense or hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	67.000	67.000	0.300	1.0	1346.7000	-
2	-	1	66.000	66.000	0.300	1.0	1306.8000	-
3	-	1	65.000	65.000	0.300	1.0	1267.5000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.6670	300.0	200.1	2615.3070	784592.1	
Total Quantity						3921.0000 cum		
Total Deducted Quantity						0.0000 cum		
Net Total Quantity						3921.00 cum		
Say 3921.0000 cum @ (₹) 208.104 / cum						815975.78		
Unskilled wage						784592.10		
Unskilled Person-days						2615.307		
2	79.03.22a -- Extra for every additional lift of 1.5 m or part there of (a) Loose/soft soil and dense/hard soil							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	67.000	67.000	0.300	1.0	1346.7000	-
2	-	1	66.000	66.000	0.300	1.0	1306.8000	-

3	-	1	65.000	65.000	0.300	1.0	1267.5000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	0.0400	300.0	12.0	156.8400	47052.0	
Total Quantity					3921.0000 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					3921.00 cum			
Say 3921.0000 cum @ (₹) 12.12 / cum					47522.52			
Unskilled wage					47052.00			
Unskilled Person-days					156.84			
3	79.01.DW -- Providing drinking water for the labours at work site. @ 01 man day for 50 man day							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	58				1.0	58.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	1.0000	300.0	300.0	58.0000	17400.0	
Total Quantity					58.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					58.00 Day			
Say 58.0000 Day @ (₹) 300.0 / Day					17400.00			
Unskilled wage					17400.00			
Unskilled Person-days					58.0			
4	79.01.mate -- Mate for labour management o1 day@ per 50 man day							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	58				1.0	58.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0115	Coolie	Day	1.0000	300.0	300.0	58.0000	17400.0	
Total Quantity					58.0000 Day			

Total Deducted Quantity	0.0000 Day
Net Total Quantity	58.00 Day
Say 58.0000 Day @ (₹) 300.0 / Day	17400.00
Unskilled wage	17400.00
Unskilled Person-days	58.0

Heading / Description: 2 - PACHARI NIRMAN KARYA

1	79.03.01b -- Earth work in bulk excavation (exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated soil lead upto 50m and lift upto 1.5m, disposed soil to be levelled and neatly dressed. (b)Dense or hard soil							
---	---	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	top lower	2	7.500	0.800	0.500	2.0	12.0000	-
2	step	2	6.100	1.500	0.300	2.0	10.9800	-
3	step	6	6.100	0.750	0.300	2.0	16.4700	-
4	wall	2	3.800	0.300	0.500	2.0	2.2800	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0115	Coolie	Day	0.6670	300.0	200.1	27.8339	8350.17

Total Quantity	41.7300 cum
Total Deducted Quantity	0.0000 cum
Net Total Quantity	41.73 cum
Say 41.7300 cum @ (₹) 208.104 / cum	8684.18
Unskilled wage	8350.17
Unskilled Person-days	27.8339100000000003

2	79.04.13b -- Providing and laying in foundation, plinth and under floors cement concrete with 40mm nominal size graded stone aggregates (metal) i/c ramming in layers and curing complete excluding cost of form work (b) C.C. 1:3:6 (1cement, 3sand, 6metal)							
---	--	--	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	top lower	2	7.500	0.800	0.200	2.0	4.8000	-
2	step	2	6.100	1.500	0.100	2.0	3.6600	-
3	step	6	6.100	0.750	0.100	2.0	5.4900	-
4	wall	2	3.800	0.300	0.100	2.0	0.4560	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0128	Mate	Day	0.0400	444.0	17.76	0.5762	255.85
0124	Mason (brick layer)2nd class	Day	0.0500	444.0	22.2	0.7203	319.81
0123	Mason (brick layer) 1st class	Day	0.0500	474.0	23.7	0.7203	341.42
0115	Coolie	Day	1.9000	300.0	570.0	27.3714	8211.42
0367	Portland Cement	tonne	0.2200	6627.88	1458.13	3.1693	21005.87
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	1.4406	2366.27
0982	Coarse sand (zone III)	cum	0.4700	448.67	210.87	6.7708	3037.86
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.2400	1313.33	315.2	3.4574	4540.76
0293	Stone Aggregate(single size): 40 mm nominal size	cum	0.6500	1149.4	747.11	9.3639	10762.87

Total Quantity					14.4060 cum		
Total Deducted Quantity					0.0000 cum		
Net Total Quantity					14.41 cum		
Say 14.4060 cum @ (₹) 3670.403048 / cum					52875.83		
Unskilled wage					8211.42		
Unskilled Person-days					27.3714		

3	79.04.25b -- Providing and placing in position RCC for roof, beams, columns column footing lintels chhajjas, balcony, stairs etc, excluding cost of reinforcement & centring but including finishing & curing. (b) CC 1:1.5:3 (1cement, 1.5sand, 3graded stone aggregate 20 mm nominal size)						
---	---	--	--	--	--	--	--

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	step	2	6.100	1.500	0.300	2.0	10.9800	-
2	step	6	6.100	0.750	0.300	2.0	16.4700	-
3	down	1	7.500	0.300	0.300	2.0	1.3500	-

LIST								
-------------	--	--	--	--	--	--	--	--

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7129	Scaffoldings (L.S.)	sqm	6.8000	11.0	74.8	195.8400	2154.24
0128	Mate	Day	0.0800	444.0	35.52	2.3040	1022.98
0125	Mason (for plain stone work) 2nd class	Day	0.0900	444.0	39.96	2.5920	1150.85
0126	Mason (for Ornamental stone work) 1st class	Day	0.0900	474.0	42.66	2.5920	1228.61

0115	Coolie	Day	2.3700	300.0	711.0	68.2560	20476.8	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.1000	1642.56	164.26	2.8800	4730.57	
0367	Portland Cement	tonne	0.4000	6627.88	2651.15	11.5200	76353.18	
0982	Coarse sand (zone III)	cum	0.4300	448.67	192.93	12.3840	5556.33	
0297	Stone Aggregate(single size): 10 mm nominal size	cum	0.2800	972.28	272.24	8.0640	7840.47	
0295	Stone Aggregate(single size):20 mm nominal size	cum	0.5700	1313.33	748.6	16.4160	21559.63	
Total Quantity					28.8000 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					28.80 cum			
Say 28.8000 cum @ (₹) 5130.437104 / cum					147756.59			
Unskilled wage					20476.80			
Unskilled Person-days					68.256			
4	79.09.04b -- Providing and placing in position tested steel for R.C.C. work including cutting, bending, binding etc. as per drawings and placing in position complete up to floor two level including cost of binding wire and all wastage etc. complete. (b) Cold twisted / Hot rolled deformed / Thermo mechanically treated steel bars							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1	28.800			60.0	1728.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
1005	Twisted steel/deformed bars	quintal	0.0105	6577.0	69.06	18.1440	119333.09	
7335	Binding wire	kilogram	0.0100	75.84	0.76	17.2800	1310.52	
0115	Coolie	Day	0.0100	300.0	3.0	17.2800	5184.0	
0102	Blacksmith 1st class	Day	0.0100	474.0	4.74	17.2800	8190.72	
Total Quantity					1728.0000 kg			
Total Deducted Quantity					0.0000 kg			
Net Total Quantity					1728.00 kg			
Say 1728.0000 kg @ (₹) 80.659176 / kg					139379.06			
Unskilled wage					5184.00			
Unskilled Person-days					17.28			
5	79.04.300 -- False work for R.C.C. and P.C.C. work in plinth and foundation False work for R.C.C. and P.C.C. work in plinth and foundation							

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	step	8	7.100		0.300	2.0	34.0800	-
2	down	2	7.500		0.300	2.0	9.0000	-
3	side	2	5.200		0.300	2.0	6.2400	-

LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
0112	Carpenter 2nd class	Day	0.1488	444.0	66.07	7.3393	3258.64
0115	Coolie	Day	0.1488	300.0	44.64	7.3393	2201.79
1197	Second class kail wood in scantling	10 cud m	0.0321	5200.43	167.16	1.5853	8244.17

Total Quantity 49.3200 sqm

Total Deducted Quantity 0.0000 sqm

Net Total Quantity 49.32 sqm

Say 49.3200 sqm @ (₹) 288.985769 / sqm 14252.78

Unskilled wage 2201.79

Unskilled Person-days 7.339285690800001

6 **79.06.05j** -- Class 25 open bhatta or pajawa burnt brick masonry in plinth and foundation. (j) Cement mortar 1:6 (1cement, 6sand)

SI No	Description	No	L	B	D	CF	Quantity	Remark
1	wall	1	7.500	0.200	1.800	2.0	5.4000	include foundation
2	side wall	2	5.200	0.200	1.800	2.0	7.4880	include foundation
3	changing room	2	1.200	0.200	1.500	2.0	1.4400	-
4	-	2	1.500	0.200	1.500	2.0	1.8000	-
5	open	1	1.200	0.200	1.500	2.0	-0.7200	-
6	changing	2	0.900	0.200	1.500	2.0	-1.0800	-



LIST

Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)
MR7240	Brick Class 25 open bhatta or Pajwa burnt (iind class) (Rate at bhatta)	1000 nos	520.0000	3.65	1900.41	7450.5600	27229.11
0115	Coolie	Day	1.8890	300.0	566.7	27.0656	8119.68

0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0105	1642.56	17.25	0.1504	247.11	
0367	Portland Cement	tonne	0.0525	6627.88	347.96	0.7522	4985.62	
0983	Fine sand (zone IV)	cum	0.2247	431.44	96.94	3.2195	1389.02	
0124	Mason (brick layer)2nd class	Day	0.3900	444.0	173.16	5.5879	2481.04	
0123	Mason (brick layer) 1st class	Day	0.3900	474.0	184.86	5.5879	2648.67	
Total Quantity					16.1280 cum			
Total Deducted Quantity					-1.8000 cum			
Net Total Quantity					14.33 cum			
Say 14.3280 cum @ (₹) 3418.779465 / cum					48984.27			
Unskilled wage					8119.68			
Unskilled Person-days					27.065592			
7	79.10.07d -- 15mm thick cement plaster on rough side of wall in (d) Cement mortar 1:6 (1cement, 6sand)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	wall	2	7.500		1.800	2.0	54.0000	include foundation
2	side wall	4	5.200		1.800	2.0	74.8800	include foundation
3	changing room	4	1.200		1.500	2.0	14.4000	-
4	-	4	1.500		1.500	2.0	18.0000	-
5	open	1	1.200	0.500	1.500	2.0	-1.8000	-
6	changing	2	0.900	0.500	1.500	2.0	-2.7000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0367	Portland Cement	tonne	0.0043	6627.88	28.17	0.6663	4416.26	
0124	Mason (brick layer)2nd class	Day	0.0830	444.0	36.85	13.0127	5777.66	
MR7129	Scaffoldings (L.S.)	sqm	0.5351	11.0	5.89	83.8930	922.82	
0002	Hire charges of Concrete Mixer 0.25 to 0.40 cum with Hopper	Day	0.0009	1642.56	1.4	0.1333	218.89	
0983	Fine sand (zone IV)	cum	0.0182	431.44	7.85	2.8518	1230.39	
0115	Coolie	Day	0.1963	300.0	58.89	30.7759	9232.77	
Total Quantity					161.2800 sqm			
Total Deducted Quantity					-4.5000 sqm			


Net Total Quantity						156.78 sqm		
Say 156.7800 sqm @ (₹) 144.602286 / sqm						22670.75		
Unskilled wage						9232.77		
Unskilled Person-days						30.775914		
8	79.13.08 -- White washing with lime on undecorated wall surfaces (two coats) to give an even shade including thoroughly broomed the surface to remove all dirt, dust, mortar drops and other foreign matter.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	-	1				156.78	156.7800	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
MR7211	Indigo gum (L.S.)	Packet	0.0622	11.0	0.68	9.7517	107.27	
0776	Satna lime	quintal	0.0020	680.71	1.36	0.3136	213.44	
0115	Coolie	Day	0.0070	300.0	2.1	1.0975	329.24	
0141	White Washer	Day	0.0130	444.0	5.77	2.0381	904.93	
Total Quantity						156.7800 sqm		
Total Deducted Quantity						0.0000 sqm		
Net Total Quantity						156.78 sqm		
Say 156.7800 sqm @ (₹) 10.314325 / sqm						1617.08		
Unskilled wage						329.24		
Unskilled Person-days						1.09746		
3	Lump sum Type : Material	Miscellaneous /Contingencies charges						18000.0
4	Lump sum Type : Material	Display Board / CIB						5000.0
5	Lump sum Type : Material	BFT/TA/Mate						12000.0
6	Lump sum Type : Admin	Worksite facilities/Creche/Drinking water/First aid						12440.0
Total (₹) :								1381958.83
Rounded Total (₹) :								13,81,959.00
Rupees Thirteen Lakh Eighty One Thousand Nine Hundred and Fifty Nine Only								
Unskilled Manpower wages								928549.97
Materials (Includes Extra Charges)								378387.68
Carriage								0.00

Skilled	12409.42
SemiSkilled	15171.76
Lumpsum Admin	12440.00
Lumpsum Material	35000.00
No of Person days	3095.17

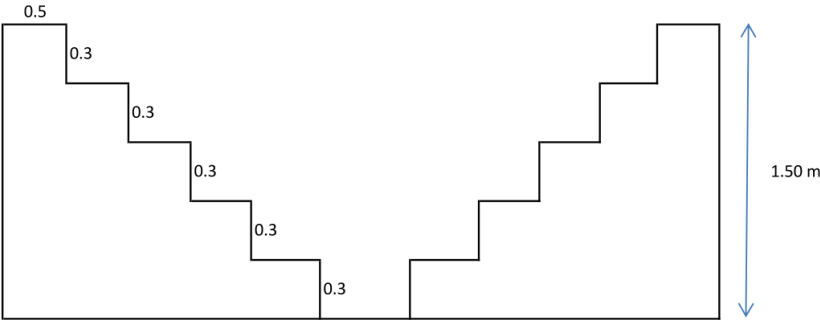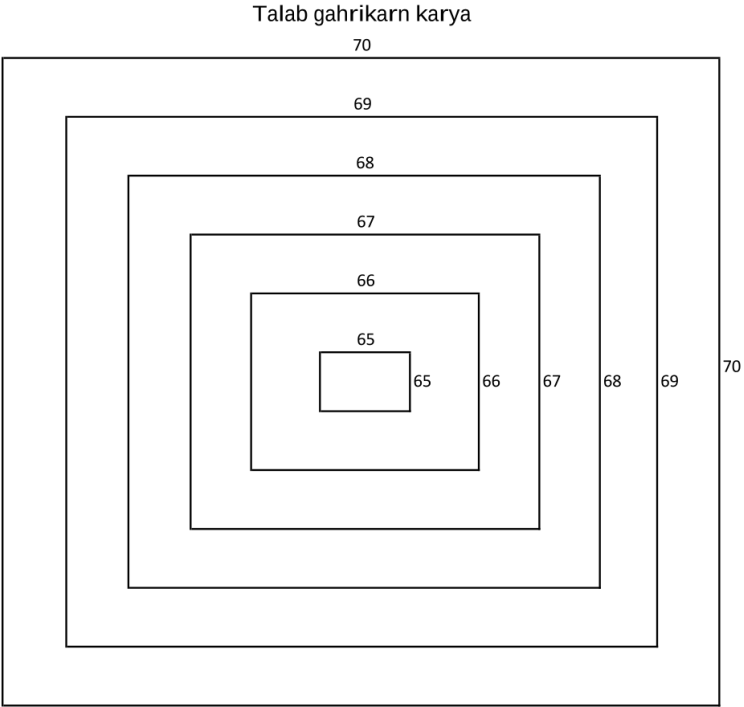


Technical Assistant
Janpad Panchayat
Mohala

PACHARI NIRMAN KARYA

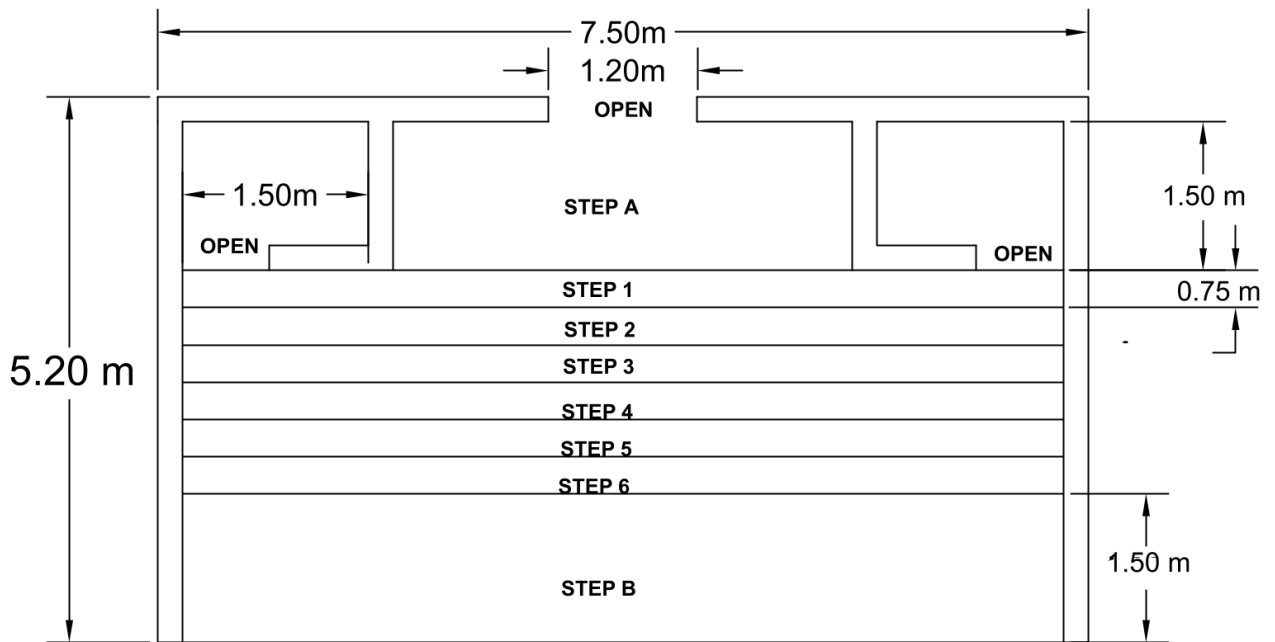

Sub Engg. / Technical Assistant
Janpad Panchayat Mohla